# All India Institute of Medical Sciences Rishikesh-249203



### **Renovation of Toilets at AIIMS Rishikesh**

Ref. No.	:	21/SE/Civil/2023-24
Publishing Date	:	14-03-2024 on 3:00 PM
<b>Bid Submission Start Date</b>	:	14-03-2024 on 3:00 PM
Last Date of Bid Submission	:	05-04-2024 on 2:00 PM
Bid Opening	:	06-04-2024 on 2:00 PM

#### **INDEX**

#### Name of Work: Renovation of Toilets at AIIMS Rishikesh

Serial No.	Contents	Page No.	Remarks
1.	Cover Page	1	
2.	Index	2	
	PART - A		
2.	Notice inviting tender	3	
3.	Information and instructions for Contractors	4 to 5	
4.	Notice inviting tender	6 to 8	
	(CPWD - 6)		
5.	Integrity Pact	09 to 16	
6.	Tender and contract (Civil)	17 to 18	
7.	Schedule "A" to "F" (Civil)	19 to 24	
	PART - B		
8.	Particular specification and		
	Special conditions (Civil)	25 to 36	
9.	List of approved make	37 to 38	
10.	Schedule of Quantities	39 to 44	

Certified that this bid document contains pages 1 to 44 (One to Forty-Four page).

Executive Engineer AIIMS, Rishikesh

Tender document may be downloaded from CPPP site <u>https://eprocure.gov.in</u> NIT may be downloaded from institute's website <u>www.aiimsrishikesh.edu.in</u>

#### AIIMS, Rishikesh

#### NOTICE INVITING TENDER

The Executive Engineer, AIIMS Rishikesh on behalf of the Executive Director, AIIMS Rishikesh invites an Percentage rate e-tenders for the enlisted contractor in the appropriate classes and category in CPWD, MES, Railway and state government of Uttarakhand (PWD & IRRIGATION Department only) having an experience of the similar works from any government (state or central or any autonomous body of the central government) for the following work: -

NIT No.: 21/SE/Civil/2023-24

Name of Work: Renovation of Toilets at AIIMS Rishikesh.

Estimated Cost: **Rs. 12,70,667.98** Earnest money: **63,533.00** Period of completion: **05-04-2024 on 2:00 PM 90 Days** Last date & time of submission of bids: **05-04-2024 on 2:00 PM** 

The tender forms and other details can be seen and downloaded from the website www.aiimsrishikesh.edu.in or CPPP site http://eprocure.gov.in

#### INFORMATION AND INSTRUCTIONS FOR CONTRACTORS FOR e-TENDERING FORMING PART OF NIT AND TO BE POSTED ON WEBSITE

The Executive Engineer, AIIMS Rishikesh on behalf of the Executive Director, AIIMS Rishikesh invites an Percentage rate e-tenders for the enlisted contractor in the appropriate classes and category in CPWD, MES, and state government of Uttarakhand (PWD & IRRIGATION Department only) having an experience of the similar works from any government (state or central or any autonomous body of the central government) for the following work:

Name of work & Location	Estimated cost put to bid	Earnest Money	Period of Completion	Last date & time of submission of bid	Time & date of opening of bid	Date and time of submission of EMD in hard form to Executive Engineer office
<u>Renovation of Toilets</u> <u>at AIIMS Rishikesh</u>	Rs.12,70,667.98	63,533.00	90 Days	05-04-2024 on 2:00 PM		Agency can submit EMD in hard copy in a sealed envelope with clearly mentioning the Tender Id No. on or before last date and time of submission of bid. Delay is the post or courier may be treated as disqualified.

- 1. The intending bidder must read the terms and conditions of CPWD-6 carefully. He should only submit his bid if he considers himself eligible and he is in possession of all the documents required.
- 2. Information and Instructions for bidders posted on website shall form part of bid document.
- 3. The bid document consisting of plans, specifications, the schedule of quantities of various types of items to be executed and the set of terms and conditions of the contract to be complied with and other necessary documents can be seen and downloaded from website <u>www.aiimsrishikesh.edu.in</u> or <u>https://eprocure.gov.in</u>
- 4. Those contractors not registered on the website mentioned above, are requested to get registered beforehand.
- 5. The intending bidder must have valid class-III digital signature to submit the bid.
- 6. On opening date, the contractor can login and see the bid opening process. After opening of bids he will receive the competitor bid sheets.
- 7. Contractor can upload documents in the form of PDF format only.
- 8. The contractor should quote the rate of item including GST as per statutory rules.
- 9. The successful bidders have to execute a contract on Indian non judicial stamp paper of Rs.100/-(Rupees one hundred only) within Ten (10) days from the date of award of this tender in his favour and also required to furnish the 10% against performance guarantee of contract value in the form of FD from any Nationalized/ Schedule bank duly pledged in favour of AIIMS, Rishikesh & payable at Rishikesh only. If the successful bidder fails to furnish the full Performance guarantee within 10 (Ten) days after the issue of Letter of Acceptance of Work, action will be taken as per bid declaration form, unless time extension has been granted by AIIMS, Rishikesh.

- 10. The bid shall be valid and open for acceptance by the competent authority of AIIMS Rishikesh for a period of 90 (ninety) days from the date of opening of the Financial bid and no request for any variation in quoted rates and / withdrawal of tender on any ground by bidders shall be entertained. If any bidder withdraws his bid before the said period or issue of letter of acceptance, whichever is earlier, or makes any modifications in the terms and conditions of the bid which are not acceptable to the department, Further the bidders shall not be allowed to participate in the re-bidding process of the work & action shall be taken as per undertaking furnished.
- 11. Contractor shall deposit earnest money in receipt treasury challan/deposit at call receipt of a schedule bank/fixed deposit receipt of schedule bank/demand draft of schedule bank/bank guarantee issued by a schedule bank is scanned and uploaded and submit in original upto one day after last date of submission of bid or contractor can submit EMD directly in bank account of AIIMS Rishikesh. Detail is mentioned below-

Account Number: -6189000100021125 Bank name: - Punjab National Bank Branch name: - PNB Pashulok IFSC code: - PUNB0618900

- 12. List of Self attested Documents to be scanned and uploaded in CPP portal at AIIMS Rishikesh within the period of bid submission, failing which the bid of the tenderer shall be rejected:
  - I. Scanned copy of EMD in form of FDR/DD/online receipt.
  - II. Affidavit (on Rs.100 non judicial stamp with notarized) regarding establishment of proprietorship firm / registered partnership deed / letter of incorporation for private ltd / ltd firmwith written power of attorney (in case of bidder is owner, not required) of the authorized signatory.
  - III. Self-certified copy of work completion certificate for similar works as per eligibility criteria
  - IV. Proof of online deposit of tender fee and EMD. For tender fee exemption, NSIC/MSE certificate comprising relevant category of work should be uploaded.
  - V. Copy of registration certificate with CPWD, State PWD, MES, as mentioned in NIT.
  - VI. Notarized undertaking on Rs. 100 non judicial stamp paper as per NIT.
  - VII. Turnover certificate of last three years having UDIN number issued by the CA.
  - VIII. Valid solvency certificate not more than six months.
  - IX. GST,
  - X. PAN,
  - XI. ESI,
  - XII. EPÉ
  - XIII. Notarized copy of the registered partnership deed.
  - XIV. Valid Registration certificate of contractor in the appropriate category.
  - XV. Proposal for eligible associating agencies as per Form-G

13.Location for shops shall be decided by Competent Authority.

# 14. Due to Scarcity of funds payments may get delayed. No interest shall be paid to contractor due to delay in payment.

- 15. Contract/Bidder have to submit EMD in hard copy in a sealed envelope with clearly mentioning the Tender Id No. on or before the last date and time of submission of bid. Delay in the post or courier may be treated as disqualified.
- 16. Additional Performance Security may be applicable in case of bidder quoted the abnormal below rate which is decided by the competent authority. The abnormal below rate may also be decided by the competent authority and their decision may be final. Bidder/Contractor has also to submit the market rate analysis to carry out the work. Non-submission of the Additional performance guarantee in a stipulated time shall be treated as disqualified from the contract and bidder/contractor may also be debarred for the three years in further participation in any bid of any department AIIMS.

## Govt. of India AIIMS, Rishikesh Notice Inviting e-Tender

The Executive Engineer, AIIMS Rishikesh on behalf of the Executive Director, AIIMS Rishikesh invites Percentage rate e-tenders from enlisted contractor in the appropriate classes and category in CPWD, MES, and state government of Uttarakhand (PWD & IRRIGATION Department only) for the work "<u>Renovation of</u> **Toilets at AIIMS Rishikesh**"

- 1.1 The work is estimated to Cost **Rs 12,70,667.98**, this estimate, however, is given merely as a rough guide.
- 1.2 Intending tenderer is eligible to submit the bid provided he has definite proof from the appropriate authority, which shall be to the satisfaction of the competent authority, of having satisfactorily completed similar works of magnitude specified below: -

#### Criteria of eligibility for submission of bid documents

#### **1.2.1** Criteria of eligibility for the Experience

Experience of having successfully completed similar works during the last seven years ending last day of month previous to the one in which tenders are invited.

(a) Three similar completed works each costing not less than 40% of the estimated cost put to tender,

or

(b) Two similar completed works each costing not less than 60% of the estimated cost put to tender,

or

(c) One similar completed work costing not less than 80% of the estimated cost put to tender.

Similar works means Experience of building construction work/Renovation work/Civil Maintenance Work.

The value of executed works shall be brought to current costing level by enhancing the actual value of work at simple rate of 7% per annum; calculated from the date of completion to last date of receipt of tenders.

#### **1.2.2.** Certificate of Registration for GST and acknowledgement of up to date filed return.

- 1.2.3. Certificate of work experience issued by the Government department/PSU. (As specified in Clause 1.2.1 of CPWD-6)
- 1.2.4. Valid enlistment certificate of Government department mentioned in the NIT.
- 1.2.5. Scanned copy of EMD in form of FDR/DD/online receipt and Contract/Bidder have to submit EMD in hard copy in a sealed envelope with clearly mentioning the Tender Id No. on or before the last date and time of submission of bid. Delay in the post or courier may be treated as disqualified.
- 2. Agreement shall be drawn with the successful bidders on prescribed Form No. CPWD 7 which is available as a Govt. of India Publication and also available on website www.cpwd.gov.in. Bidders shall quote his rates as per various terms and conditions of the said form which will form part of the agreement.
- 3. The time allowed for carrying out the work will be **90 Days** from the date of start as defined in schedule 'F' or from the first date of handing over of the site, whichever is later, in accordance with the phasing, if any, indicated in the bid documents.

- 4. The site for the work is available. The architectural and structural drawings shall be made available as per requirement of the same as per approved programme of completion submitted by the contractor after award of the work.
- 5 The tender document consisting of plans if any, specifications, the schedule of quantities of various types of items to be executed and the set of terms and conditions of the contract to be complied with and other necessary documents except Standard General Conditions Of Contract Form can be seen from website <u>www.aiimsrishikesh.edu.in</u> or <u>https://eprocure.gov.in</u>

The bid submitted shall be opened on 06-04-2024 on 2:00 PM

- 6. The contractor whose bid is accepted will be required to furnish performance guarantee of 10 (Ten Percent) of the tendered amount within the period specified in Schedule F. This guarantee shall be in the form of cash (in case guarantee amount is less than Rs. 10000/-) or Deposit at Call receipt of any scheduled bank/Banker's cheque of any scheduled bank/Demand Draft of any scheduled bank/Pay order of any Scheduled Bank (in case guarantee amount is less than Rs. 1, 00,000/-) or Government Securities or Fixed Deposit Receipts or Guarantee Bonds of any Scheduled Bank or the State Bank of India in accordance with the prescribed form. In case the contractor fails to deposit the said performance guarantee within the period as indicated in Schedule 'F' including the extended period.
- 7. Intending Bidders are advised to inspect and examine the site and its surroundings and satisfy themselves before submitting their tenders as to the nature of the ground and sub-soil (so far as is practicable), the form and nature of the site, the means of access to the site, the accommodation they may require and in general shall themselves obtain all necessary information as to risks, contingencies and other circumstances which may influence or affect their bid. A bidder shall be deemed to have full knowledge of the site whether he inspects it or not and no extra charge consequent on any misunderstanding or otherwise shall be allowed. The bidders shall be responsible for arranging and maintaining at his own cost all materials, tools & plants, water, electricity access, facilities for workers and all other services required for executing the work unless otherwise specifically provided for in the contract documents. Submission of a bid by a bidder implies that he has read this notice and all other contract documents and has made himself aware of the scope and specifications of the work to be done and local conditions and other factors having a bearing on the execution of the work.
- 8. The competent authority does not bind itself to accept the lowest or any other bid and reserves to itself the authority to reject any or all the bids received without the assignment of any reason. All bids in which any of the prescribed condition is not fulfilled or any condition including that of conditional rebate is put forth by the tenderer shall be summarily rejected.
- 9. Canvassing whether directly or indirectly, in connection with bidders is strictly prohibited and the tenders submitted by the contractors who resort to canvassing will be liable to rejection.
- 10. The competent authority reserves to himself the right of accepting the whole or any part of the tender and the tenderer shall be bound to perform the same at the rate quoted.
- 11. The contractor shall not be permitted to tender for works in AIIMS Rishikesh in which his near relative is posted as Divisional Accountant or as an officer in any capacity between the grades of Executive Engineer and Junior Engineer (both inclusive). He shall also intimate the names of persons who are working with him in any capacity or are subsequently employed by him and who are near relatives to any gazette officer in AIIMS Rishikesh. Any breach of this condition by the contractor would render him liable to reject his Bid submitted by him.
- 12. This notice inviting Bid shall form a part of the contract document. The successful bidders /contractor, on acceptance of his tender by the Accepting Authority shall within 10 days from the stipulated date of start of the work, sign the contract consisting of:
  - a) The Notice Inviting Bid, all the documents including additional conditions, specifications and drawings, if any, forming part of the tender as uploaded at the time of invitation of tender.

- b) Standard C.P.W.D. Form 7 or General condition of contract for C.P.W.D Maintenance work 2020 with up to date correction slips.
- 13. The valid solvency certificate of minimum 40% of the tendered amount issued by any nationalized bank under the governed by RBI.
- 14. The turnover certificate issued by the Charted Accountant having valid UDIN number of the last 3 years. The average turnover is the 50% percent of the tendered amount.
- 15. The bidder has to enclose the valid EPF and ESI certificate.
- 16. Completion certificate issued by Competent Authority will only be considered. Competent Authority means officer of not below the rank of Executive Engineer/ Equivalent would be acceptable.
- 17. Notarized copy of the registered partnership deed.

18. Valid Registration certificate of enlistment of contractor in the appropriate category in appropriate class as mentioned in above first para.

#### **INTEGRITY PACT**

To,

#### Sub: 21/SE/Civil/2023-24 Renovation of Toilets at AIIMS Rishikesh

Dear Sir,

It is here by declared that AIIMS Rishikesh is committed to follow the principle of transparency, equity and competitiveness in public procurement.

The subject Notice Inviting Tender (NIT) is an invitation to offer made on the condition that the Bidder will sign the integrity Agreement, which is an integral part of tender / bid documents, failing which the tenderer / bidder will stand disqualified from the tendering process and the bid of the bidder would be summarily rejected.

This declaration shall form part and parcel of the Integrity Agreement and signing of the same shall be deemed as acceptance and signing of the Integrity Agreement on behalf of the AIIMS Rishikesh.

Yours faithfully,

Executive Engineer AIIMS Rishikesh The Executive Engineer, AIIMS Rishikesh,

Sub: Submission of Tender for the work of **Renovation of Toilets at AIIMS Rishikesh** 

Dear Sir,

 $\rm I$  / We acknowledge that AIIMS Rishikesh is committed to follow the principles thereof as enumerated in the Integrity Agreement enclosed with the tender/bid document.

I / We agree that the Notice Inviting Tender (NIT) is an invitation to offer made on the condition that I/We will sign the enclosed integrity Agreement, which is an integral part of tender documents, failing which I/We will stand disqualified from the tendering process. I/We acknowledge that THE MAKING OF THE BID SHALL BE REGARDED AS AN UNCONDITIONAL AND ABSOLUTE ACCEPTANCE of this condition of the NIT.

I/We confirm acceptance and compliance with the Integrity Agreement in letter and spirit and further agree that execution of the said Integrity Agreement shall be separate and distinct from the main contract, which will come into existence when tender/bid is finally accepted by AIIMS Rishikesh. I/We acknowledge and accept the duration of the Integrity Agreement, which shall be in the line with Article 1 of the enclosed Integrity Agreement.

I/We acknowledge that in the event of my/our failure to sign and accept the Integrity Agreement, while submitting the tender/bid, AIIMS Rishikesh shall have unqualified, absolute and unfettered right to disqualify the tenderer/bidder and reject the tender/bid is accordance with terms and conditions of the tender/bid.

Yours faithfully

(Duly authorized signatory of the Bidder)

#### <u>To be signed by the bidder and same signatory competent / authorised to</u> <u>sign the relevant contract on behalf of the Executive Director AIIMS Rishikesh.</u>

#### **INTEGRITY AGREEMENT**

#### BETWEEN

'**Principal** / **Owner'**, which expression shall unless repugnant to the meaning or context hereof include its successors and permitted assigns)

#### AND

(Name and Address of the Individual/firm/Company) Through......(hereinafter referred to as the (Details of duly authorized signatory)

"**Bidder/Contractor**" and which expression shall unless repugnant to the meaning or context hereof include its successors and permitted assigns)

#### Preamble

WHEREAS the Principal /Owner has floated the Tender (NIT No.

.....) (hereinafter referred to as "**Tender/Bid**") and intends to award, under laid down organizational procedure, contract for

(Name of work)

Hereinafter referred to as the "Contract".

AND WHEREAS the Principal / Owner values full compliance with all relevant laws of the land, rules, regulations, economic use of resources and of fairness/transparency in its relation with its Bidder(s) and Contractor(s).

AND WHEREAS to meet the purpose aforesaid both the parties have agreed to enter into this Integrity Agreement (hereinafter referred to as "Integrity Pact" or "Pact"), the terms and conditions of which shall also be read as integral part and parcel of the Tender/Bid documents and Contract between the parties.

NOW, THEREFORE, in consideration of mutual covenants contained in this Pact, the parties hereby agree as follows and this Pact witnesses as under:

#### Article 1: Commitment of the Principal / Owner

- 1) The Principal/Owner commits itself to take all measures necessary to prevent corruption and to observe the following principles:
  - (a) No employee of the Principal/Owner, personally or through any of his/her family members, will in connection with the Tender, or the execution of the Contract, demand, take a promise for or accept, for self or third person, any material or

immaterial benefit which the person is not legally entitled to.

- (b) The Principal/Owner will, during the Tender process, treat all Bidder(s) with equity and reason. The Principal/Owner will, in particular, before and during the Tender process, provide to all Bidder(s) the same information and will not provide to any Bidder(s) confidential / additional inform
- (c) ation through which the Bidder(s) could obtain an advantage in relation to the Tender process or the Contract execution.
- (d) The Principal / Owner shall endeavour to exclude from the Tender process any person, whose conduct in the past has been of biased nature.
- If the Principal/Owner obtains information on the conduct of any of its employees which is a criminal offence under the Indian Penal code (IPC) / Prevention of Corruption Act, 1988 (PC Act) or is in violation of the principles herein mentioned or if there be a substantive suspicion in this regard, the Principal / Owner will inform the Chief Vigilance Officer and in addition can also initiate disciplinary actions as per its internal laid down policies and procedures.

#### Article 2: Commitment of the Bidder (s) / Contractor (s)

- It is required that each Bidder / Contractor (including their respective officers, employees and agents) adhere to the highest ethical standards, and report to the Government / Department all suspected acts of **fraud or corruption or Coercion or Collusion** of which it has knowledge or becomes aware, during the tendering process and throughout the negotiation or award of a contract.
- 2) The Bidder(s) / Contractor(s) commit himself to take all measures necessary to prevent corruption. He commits himself to observe the following principles during his participation in the Tender process and during the Contract execution:
  - a) The Bidder(s) / Contractor(s) will not, directly or through any other person or firm, offer, promise or give to any of the Principal / Owner's employees involved in the Tender process or execution of the Contract or to any third person any material or other benefit which he/she is not legally entitled to, in order to obtain in exchange any advantage of any kind whatsoever during the Tender process or during the execution of the Contract.
  - b) The Bidder(s) / Contractor (s) will not enter with other Bidder (s) into any undisclosed agreement or understanding, whether formal or informal. This applies in particular to prices, specifications, certifications, subsidiary contracts, submission or non-submission of bids or any other actions to restrict competitiveness or to cartelize in the bidding process.
  - c) The Bidder(s) / Contractor(s) will not commit any offence under the relevant IPC/PC Act. Further the Bidder(s) / Contract(s) will not use improperly, (for the purpose of competition or personal gain), or pass on to others, any information or documents provided by the Principal/Owner as part of the business relationship, regarding plans, technical proposals and business details, including information contained or transmitted electronically.
  - d) The Bidder(s)/ Contractor(s) of foreign origin shall disclose the names and addresses of

agents / representatives in India, if any. Similarly, Bidder(s)/Contractor(s) of Indian Nationality shall disclose names and addresses of foreign agents/representatives, if any. Either the Indian agent on behalf of the foreign principal or the foreign principal directly could bid in a tender but not both. Further, in cases where an agent participates in a tender on behalf of one manufacturer, he shall not be allowed to quote on behalf of another manufacturer along with the first manufacturer in a subsequent/parallel tender for the same item.

d) The Bidder(s)/ Contractor(s) will, when presenting his bid, disclose (with each tender as per performa enclosed) any and all payments he has made, is committed to or intends to make to agents, brokers or any other intermediaries in connection with the award of the Contract

3) The Bidder(s)/ Contractor(s) will not instigate third persons to commit offences outlined above or be an accessory to such offences.

- 4) The Bidder(s)/Contractor(s) will not, directly or through any other person or firm indulge in fraudulent practice means a willful misrepresentation or omission of facts or submission of fake / forged documents in order to induce public official to act in reliance thereof, with the purpose of obtaining unjust advantage by or causing damage to justified interest of others and/or to influence the procurement process to the detriment of the Government interests.
- 5) The Bidder(s) / Contractor(s) will not, directly or through any other person or firm use Coercive Practices (means the act of obtaining something, compelling an action or influencing a decision through intimidation, threat or the use of force directly or indirectly, where potential or actual injury may befall upon a person, his / her reputation or property to influence their participation in the tendering process).

#### Article 3: Consequences of Breach

Without prejudice to any rights that may be available to the Principal/Owner under law or the Contract or its established policies and laid down procedures, the Principal / Owner shall have the following rights in case of breach of this Integrity Pact by the Bidder(s)/Contractor(s) and the Bidder / Contractor accepts and undertakes to respect and uphold the Principal / Owner's absolute right:

- 1) If the Bidder (s) / Contractor(s), either before award or during execution of Contract has committed a transgression through a violation of Article 2 above or in any other form, such as to put his reliability or credibility in question, the Principal/Owner after giving 14 days notice to the contractor shall have powers to disqualify the Bidder(s)/Contractor(s) from the tender process or terminate/determine the Contract, if already executed or exclude the Bidder/Contractor from future contract award processes. The imposition and duration of the exclusion will be determined by the severity of transgression and determined by the Principal/Owner. Such exclusion may be forever or for a limited period as decided by the Principal/Owner.
  - 2) Performance Guarantee/Security Deposit:

If the Principal/Owner has disqualified the Bidder(s) from the Tender process prior to the award of the Contract or terminated/determined the Contract or has accrued the right to terminate/determine the Contract according to Article 3(1), the Principal/Owner apart from exercising any legal rights that may have accrued to the Principal/Owner, may in its considered

opinion forfeit the entire amount of Earnest Money Deposit, Performance Guarantee and Security Deposit of the Bidder / Contractor.

#### 3) Criminal Liability:

If the Principal/Owner obtains knowledge of conduct of a Bidder or Contractor, or of an employee or a representative or an associate of a Bidder or Contractor which constitutes corruption within the meaning of Indian Penal code (IPC)/Prevention of Corruption Act, or if the Principal/Owner has substantive suspicion in this regard, the Principal/Owner will inform the same to law enforcing agencies for further investigation.

#### Article 4: Previous Transgression

- The Bidder declares that no previous transgressions occurred in the last 5 years with any other Company in any country confirming to the anticorruption approach or with Central Government or State Government or any other Central/State Public Sector Enterprises in India that could justify his exclusion from the Tender process.
- 2) If the Bidder makes incorrect statement on this subject, he can be disqualified from the Tender process or action can be taken for banning of business dealings/ holding listing of the Bidder/Contractor as deemed fit by the Principal/ Owner.
- 3) If the Bidder/Contractor can prove that he has resorted / recouped the damage caused by him and has installed a suitable corruption prevention system, the Principal/Owner may, at its own discretion, revoke the exclusion prematurely.

#### Article 5: Equal Treatment of all Bidders/Contractors/Subcontractors

- 1) The Bidder(s)/Contractor(s) undertake(s) to demand from all subcontractors a commitment in conformity with this Integrity Pact. The Bidder / Contractor shall be responsible for any violation(s) of the principles laid down in this agreement/Pact any Subby of its contractors/sub-vendors.
- 2) The Principal / Owner will enter into Pacts on identical terms as this one with all Bidders and Contractors.
- 3) The Principal / Owner will disqualify Bidders, who do not submit, the duly signed Pact between the Principal/Owner and the bidder, along with the Tender or violate its provisions at any stage of the Tender process, from the Tender process.

#### Article 6- Duration of the Pact

This Pact begins when both the parties have legally signed it. It expires for the Contractor / Vendor 12 months after the completion of work under the contract or till the continuation of defect liability period, whichever is more and for all other bidders, till the Contract has been awarded.

If any claim is made/lodged during the time, the same shall be binding and continue to be valid despite the lapse of this Pacts as specified above, unless it is discharged/determined by the Competent Authority, Executive Director, AIIMS Rishikesh.

#### Article 7- Other Provisions

- This Pact is subject to Indian Law, place of performance and jurisdiction is the Head quarters of the Division of the Principal / Owner, who has floated the Tender.
- 2) Changes and supplements need to be made in writing. Side agreements have not been made.
- 3) If the Contractor is a partnership or a consortium, this Pact must be signed by all the partners or by one or more partner holding power of attorney signed by all partners and consortium members. In case of a Company, the Pact must be signed by a representative duly authorized by board resolution.
  - 4) Should one or several provisions of this Pact turn out to be invalid; the remainder of this Pact remains valid. In this case, the parties will strive to come to an agreement to their original intentions.
  - 5) It is agreed term and condition that any dispute or difference arising between the parties with regard to the terms of this Integrity Agreement / Pact, any action taken by the Owner/Principal in accordance with this Integrity Agreement/ Pact or interpretation there of shall not be subject to arbitration.

#### Article 8:- Submission

Additional Performance Security may be applicable in case of bidder quoted the abnormal below rate which is decided by the competent authority. The abnormal below rate may also be decided by the competent authority and their decision may be final. Bidder/Contractor has also to submit the market rate analysis to carry out the work. Non-submission of the Additional performance guarantee in a stipulated time shall be treated as disqualified from the contract and bidder/contractor may also be debarred for the three years in further participation in any bid of any department AIIMS.

#### Article 9- LEGAL AND PRIOR RIGHTS

All rights and remedies of the parties hereto shall be in addition to all the other legal rights and remedies belonging to such parties under the Contract and/or law and the same shall be deemed to be cumulative and not alternative to such legal rights and remedies aforesaid. For the sake of brevity, both the Parties agree that this Integrity Pact will have precedence over the Tender / Contract documents with regard any of the provisions covered under this Integrity Pact.

IN WITNESS WHEREOF the parties have signed and executed this Integrity Pact at the place and date first above mentioned in the presence of following witnesses:

(For and on behalf of Principal/Owner)

# (For and on behalf of Bidder/Contractor)

#### WITNESSES:

1.	(Signature, name and address)
2.	(Signature, name and address)

#### Place: -

Dated: -

# निविदा T E N D E R

I/We have read and examined the notice inviting tender, schedule, A, B, C, D, E & F, specifications applicable, Drawings & Designs, General Rules and Directions, Conditions of Contract, clauses of contract, Special conditions, Schedule of Rate & other documents and Rules referred to in the conditions of contract and all other contents in the tender document for the work.

I/We hereby tender for the execution of the work specified within the time specified in Schedule 'F', viz., schedule of quantities and in accordance in all respects with the specifications, designs, drawings and instructions in writing referred to in Rule-1 of General Rules and Directions and in Clause 11 of the Conditions of contract and with such materials as are provided for, by, and in respects in accordance with, such conditions so far as applicable.

We agree to keep the tender open for Ninety (90) days from the due date of opening of financial bid and not to make any modification in its terms and conditions.

I/We undertake and confirm that eligible similar work(s) has / have not been got executed through another contractor on back to back basis. Further that, if such a violation comes to the notice of AIIMS Rishikesh, then I/We shall be debarred for tendering in AIIMS Rishikesh in future forever. Also, if such a violation comes to the notice of Department before date of start of work, The Engineer - in - Charge shall be free to forfeit the entire amount of Earnest Money Deposit / Performance Guarantee.

मैं/हम एतत्द्वारा घोषणा करते है कि मै/हम निविदा कागजातों, नक्षों और कार्य से संबंधित अन्य अभिलेखों को गुप्त/गोपनीय कागजात के रूप में रखेगे और उनसे प्राप्त/ली गई जानकारी किसी अन्य को, जिन्हें मैं/हम सूचित करने के लिए प्राधिकृत हो, से भिन्न किसी को,नहीं बताएगें या जानकारी को किसी ऐसे रूप में प्रयोग नही करेंगे जो राज्य की सुरक्षा के लिए प्रतिकूल हो।

I/We hereby declare that I/we shall treat the tender documents drawings and other records connected with the work as secret/confidential documents and shall not communicate information/derived therefrom to any person other than a person to whom I/We am/are authorised to communicate the same or use the information in any manner prejudicial to the safety of the State.

तारीख Dated #.....

ठेकेदार के हस्ताक्षर Signature of Contractor# डाक का पता Postal Address#

साक्षी Witness : # पता Address: # उपजीविका Occupation: #

**#** To be filled in by the contractor/witness as applicable

#### ACCEPTANCE

The above tender (as modified vide letters mentioned hereunder) is accepted by me for and on behalf of the Executive Director, AIIMS Rishikesh for a sum of ₹.\_\_\_\_\_

(Rupees\_\_\_\_\_)

The letters referred to below shall form part of this contract Agreement: -

a)

b)

c)

For & on behalf of the Executive Director, AIIMS Rishikesh

Signature.....

तारीख Dated .....

Designation.....

#### अनुसूचियां SCHEDULES [FOR MAJOR (CIVIL) COMPONENT]

# अनुसूची 'क' SCHEDULE 'A' मात्राओं की अनुसूची (संलग्न)

Schedule of quantities (Enclosed)

Page No. - 39-44


अनुसूची 'ख' SCHEDULE 'B' टेकेदार की निर्गत की जाने वाली सामग्रियों की अनुसूची Schedule of materials to be issued to the contractor.

क्रम. सं.	मद विवरण	मात्रा	जिस दर पर सामग्रियां ठेकेदार को	निर्गत स्थान
S.No.	Description of item	Quantity	प्रभारित होगी वह दर अंकों एवं षब्दों में Rates in figures & words at which the	Place of Issue
			material will be charged to the contrac	tor
1	2	3	4	5

#### अनुसूची 'ग' SCHEDULE 'C'

ठेकेदार को भाड़े पर दिए जाने वाले औजार एवं संयत्र

#### Tools and plants to be hired to the contractor

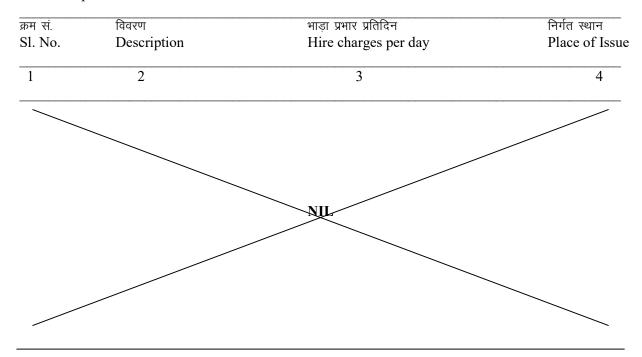

अनुसूची ध्व SCHEDULE 'D' कार्य के लिए विषेष अपेक्षाएं / दस्तावेज, यदि कोई हों, की अतिरिक्त अनुसूची Extra schedule for specific requirements/documents for the work, if any. -----Nil-----

# अनुसूची (ड) SCHEDULE 'E'

	ठेके की सामान्य षर्तो का संदर्भ	General conditions of contract for CPWD works 2020 (maintenance work)				
1.	Reference to General Conditions of contract	as amended upto date.				
	Name of work <u>Renovation of Toilets at AIIMS Rishikesh</u>					
कार्य	की अनुमानित लागत Estimated cost of work (i) धरोहर राषि Earnest money	:₹12,70,667.98 : 63,533.00 in form of FDR from scheduled bank.				
	(ii)निष्पादन गारंटी Performance guarantee :	10% of Tendered value. निविदित मूल्य का 10 प्रतिषत				
	(iii) प्रतिभूति निक्षेपः Security Deposit:	Adjusted in PBG				
अनुसूची	<sup>'च'</sup> SCHEDULE 'F' सामान्य नियम एवं दिषानिर्देषः General Rules & Directions: निविदा आमंत्रण करने वाला प्राधिकारी Officer inviting tender - कार्य की मर्दो की मात्रा के लिए अधिकतम प्रतिषत जिससे अधिक निष्पादित मदों के लिए दरों का निर्धारण खण्ड 12.2 और 12.3 के अनुसार होगा Maximum percentage for quantity of items of work to be executed beyond which rates are to be determined in accordance with Clauses 12.2 & 12.3.	<b>Executive Engineer , AIIMS Rishikesh</b> निम्नानुसार see below				
2(v)	Definitions: भारसाधक इंजीनियर Engineer-in-Charge	Executive Engineer, AIIMS Rishikesh				
2(viii)	स्वीकार कर्ता प्राधिकारी					
2(x)	Accepting Authority अतिरिक्त और लाभों को पूरा करने के लिए श्रम एवं सामग्रियों की लागत पर प्रतिषतता Percentage on cost of materials and	Superintending Engineer, AIIMS Rishikesh				
	labour to cover all overheads and profits.	15% (Fifteen per cent)				
2(xi)	दरों की मानक अनुसूची Standard schedule of Rates for Civil: -	Delhi Schedule of rate 2021(Civil)/Market Rate issued upto date of receipt of tender.				
2(xii)	विभाग Department	AIIMS Rishikesh				
9(ii)	मानक के.लो.नि.वि. ठेका फार्म Standard CPWD contract Form	<b>CPWD form7 GCC 2020Maintenance work</b> with up to date correction slip.				

खण्ड Clause 1		
;पद्ध	स्वीकृति पत्र जारी होने की तारीख से निष्पादन	
	गारंटी के प्रस्तुतीकरण के लिए अनुमत समय	
	Time allowed for submission of performance	
	acceptance	:10 days
;पपद्ध	(उपर्युक्त प) में दी गई अवधि के पष्चात् अधिकतम	
, 114	अनुमेय एक्सटेंषन	
	Maximum allowable extension with late	
	fee @ 0.10% per day of performance	
	guarantee amount beyond	
	the period as provided in (i) above	:1 to 07 days
खण्ड Clause 2		
	खण्ड 2 के तहत प्रतिकार निष्चित करने वाला प्राधिकारी	
	Authority for fixing	Superintending Engineer, AIIMS Rishikesh
	compensation under clause 2	
खण्ड Clause 2A		
	क्या खण्ड 2 क लागू होगा	
	Whether clause 2A shall be applicable	Νο
खण्ड Clause 5		
	कार्य आरंभ की तारीख की गणना के लिए स्वीकृति पत्र के जारी होने की तारीख से दिनों की संख्या	
	No. of days from the date of issue of letter of	
	acceptance for reckoning date of start	10 days.
	1 3	
	लक्ष्य नीचे दी गई सारणी के अनुसार	
Mileste		N1 A
<u>Milesto</u>	<u>ine(s)</u> : -	NA
	कार्य निष्पादित करने के लिए अनुमत्य समय	
	Time allowed for execution of work	90 (Ninety) Days
	Authority to decide	
	(i) Extension of Time	Superintending Engineer, AIIMS Rishikesh
	(ii) Rescheduling of mile stones	Superintending Engineer, AIIMS Rishikesh.
(iii) Shifting of d	ata of start in asso of	Executive Engineer AIIMS Dishilash
· /	ate of start in case of	Executive Engineer, AIIMS Rishikesh
uelay in hand	ding over of site	
खण्ड Clause 7		
	अंतरिम भुगतान के लिए पात्र होने के लिए अंतिम ऐसे	
	भुगतान के बाद कुल भुगतान एकत्रित सामग्रियों के	
	अग्रिमों के समायोजन सहित किया जाने वाला कुल कार्य	
	Gross work to be done together with net	
	payment/adjustment of advances for	Rs.5.0 Lakhs
	material collected, if any since the last	
	such payment for being eligible to interim	
	payment	
	40.0	
खण्ड 10 d Claus		
कायर	थल प्रयोगषाला में ठेकेदार द्वारा उपलब्ध कराये जाने परीक्षण उपकरण की सूची	
	List of testing equipment to be provided by the	N.A.
	contractor at site lab.	
खण्ड Clause10B	(ii)	
	क्या खण्ड 10 ख ;पपद्ध लागू होगा	
	Whether clause 10B (ii) shall be applicable	NA
	· · · · ·	
खण्डClause10C		
	Component of labour expressed as	NA
	Percent of value of work	

#### खण्ड Clause 10CC - NOT APPLICABLE.

<u>खण्ड 10</u> गग उन संविदाओं पर लागू होगा जिसमें कार्य समापन की अवधि, अग्पले कालम में दर्षाई गई अवधि से	
अधिक अनुबंधित है।	
Clause 10CC to be applicable in cd DELETE	
with sipulated period of compensation	
exceeding the period shown in next column	: Months

#### खण्ड Clause10d

Yes

खण्ड Clause 11 कार्य निष्पादन के लिए अनुपालन For Civil : CPWD specification 2019, Volume-I & II Specifications to be followed for execution of work with correction slips upto date of receipt of tender. खण्ड Clause 12 Applicable 12.2 & 12.3 विचलन सीमा जिसके परे खण्ड 12.2 तथा 12.3 भवन निर्माण कार्य के लिए लागू होंगे Deviation limit beyond which clauses 12.2 & 12.3 50% shall apply for building work (Other than foundation) 12.5 (i) Deviation limit beyond which clauses 12.2 & 12.3 50% shall apply for foundation work (except earth work) (ii) Deviation limit for items in earth work subhead of DSR or related items 100% खण्ड Clause 16 घटी हुई दरे निर्धारित करने की लिए सक्षम प्राधिकारी Superintending Engineer, AIIMS Rishikesh Competent Authority for deciding reduced rates खण्ड Clause 18 कार्यस्थल पर ठेकेदार द्वारा लगाये जाने वाली अनिवार्य मषीनरी औजार एवं सयंत्रों की सूची :--List of mandatory machines, tools and N.A. plants to be deployed by the contractor at site. खण्ड Clause 25 Constitution of dispute redressed committee (DRC) Deleted खण्ड Clause 32 NA खण्ड Clause 38 सीमेन्ट और बिटुमन की अनुमानमूल l) क) मात्रा निर्धारित करने के लिए अनुसूची/विवरण केलोनिवि द्वारा मुद्रित दिल्ली दर अनुसूची 2018 के आधार पर I) (a) Schedule/statement for determining on the basis of Delhi Schedule of Rates theoretical quantity of cement & 2021 printed by C.P.W.D. with correctionslips bitumen issued up to date of receipt of tender. अनुमानमूलक मात्राओं में अनुमत्य विचलन II) Variations permissible on theoretical quantities. Yes अनुमानमूलक मात्राओं में अनुमत्य विचलन II) Variations permissible on theoretical quantities. Yes

	मूल्य रू. 5 लाख से अधिक न हो	
a)	Cement for works with estimated cost put to tender not more than Rs. 5 lakhs	Not Applicable
	जिन कार्यो के लिए निविदामें अनुमानित मूल्य रू. 5 लाख से अधिक हो	2 प्रतिषत जमा⁄घटा
	for works with estimated cost put to tender more than Rs. 5 lakhs	2 % plus/minus.
खा)	बिटुमन सभी कार्यो के लिए	2.5 प्रतिषत केवल जमा और घटा के पक्ष में षून्य
b)	Bitumen for all works	2.5% plus only & Nil on minus side.
ग)	इस्पात प्रत्येक व्यास, कोट और श्रेणी के लिए पूनर्वलन और संरचनात्मक इस्पात काट	2 प्रतिषत जमा⁄घटा
c)	Steel Reinforcement and structural steel sections for each diameter, section and category.	2% plus/minus
ਬ) d)	सभी अन्य सामग्रियां All other materials	षून्य Nil.

# अनुमत्य विचलन से अधिक की मात्राओं के लिए वसूली दर

### RECOVERY RATES FOR QUANTITIES BEYOND PERMISSIBLE VARIATION

क्रम सं.	मद विवरण	अंको और षब्दों वसूली की जाएग	में वह दर जिस पर ठेकेदार से ो
SI No.	Description of item		es and words at which be made from the
		अनुमत्य विचलन से अधिक आधिक्य	अमुमत्य विचलन से अधिक उपयोग घटाया
		Excess beyond permissible variation	Less use beyond the permissible variation
1.	सीमेन्ट Cement	N.A.	<b>Rs. 6210/-</b> Per MT
2.	ईस्पात Steel Reinforcement	N.A.	Rs. 53099/- Per M.T.

#### FORM OF EARNEST MONEY (BANK GUARANTEE)

KNOW ALL PEOPLE by these presents that we	(name of bank)
having our registered office at	(hereinafter
called "the Bank") are bound unto	(Name and
division of Executive Engineer) (hereinafter called "the Engineer-in-Charge") in the sum of Rs.	(Rs. in words
payment well and truly to be made to the said Engineer-in-Charge the Bank binds itself, his successors these presents.	and assigns by

SEALED with the Common Seal of the said Bank this	day of
	20

#### THE CONDITIONS of this obligation are:

- (1) If after tender opening the Contractor withdraws, his tender during the period of validity of tender (including extended validity of tender) specified in the Form of Tender;
- (2) If the contractor having been notified of the acceptance of his tender by the Engineer-in-Charge:
  - (a) fails or refuses to execute the Form of Agreement in accordance with the Instructions to contractor if required.
  - Instructions to contractor, if required;
  - (b) OR
  - (b) fails or refuses to furnish the Performance Guarantee, in accordance with the provisions of tender document and Instructions to contractor, OR
  - (c) fails or refuses to start the work, in accordance with the provisions of the contract and Instructions to contractor, OR
  - (d) fails or refuses to submit fresh Bank Guarantee of an equal amount of this Bank Guarantee, against Security Deposit after award of contract.

We undertake to pay to the Engineer-in-Charge either up to the above amount or part thereof upon receipt of first written demand, without the Engineer-in-Charge having to substantiates his demand, provided that in his demand the Engineer-in-Charge will note that the amount claimed by him is due to him owing to the occurrence of one or any of the above conditions, specifying the occurred condition or conditions.

This Guarantee will remain in force up to and including the date. \* after the deadline for submission of tender as such deadline is stated in the Instructions to contractor or as it may be extended by the Engineer-in-Charge, notice of which extension(s) to the Bank is hereby waived. Any demand in respect of this Guarantee should reach the Bank not later than the above date.

DATE

#### SIGNATURE OF THE BANK

WITNESS

#### SEAL

#### (SIGNATURE, NAME AND ADDRESS)

\*Date to be worked out on the basis of validity period of 6 months from last date of receipt of tender.

## PARTICULAR SPECIFICATIONS <u>&</u> <u>SPECIAL CONDITIONS</u>

#### 1. <u>GENERAL</u>

- 1.1 Wherever any reference to any Indian Standard Specifications of BIS occurs in the documents relating to this contract, the same shall be inclusive of all amendments issued there-to or revisions thereof, if any, up to the date of receipt of tenders.
- 1.2 The contractor shall work according to the programme of work as approved by the Engineer-incharge, for which purpose, the contractor shall submit a programme of the work within 15 days from the stipulated date of start of the work.
- 1.3 The contractor shall take instructions from the Engineer-in-charge for stacking of materials at site. No excavated earth or building materials shall be stacked on areas where the buildings, roads, services or compound walls are to be constructed.
- 1.5 Unless otherwise provided in the Schedule of quantities, the rates tendered by the contractor shall be all inclusive and shall apply to all heights, lifts, leads and depths of the building and nothing shall be payable to him on this account.
- 1.6 The working drawings appearing at para 8.1(iii) of conditions of contract in the form CPWD-8, shall mean to include both architectural and structural drawings respectively. The structural and architectural drawings shall be properly correlated before executing the work. In case of any difference noticed between architectural and structural drawings, final decision, in writing of the Engineer-in-charge shall be obtained by the contractor before proceeding further.
- 1.7 Some restrictions may be imposed by the security staff etc. on the working and for movement of labour, materials etc. The contractor shall be bound to follow all such restriction / instructions including issue of identity cards to all persons authorized by him to do work / visit the work site and nothing shall be payable on this account.
- 1.8 The contractor shall make his own arrangements for obtaining electric connections, if required, and make necessary payments directly to the department concerned.
- 1.9 The contractor shall conduct his work, so as not to interfere with or hinder the progress or completion of the work being performed by other contractor (s) or by the Engineer-in-Charge and shall as far as possible arrange his work and shall place and dispose of the materials being used or removed, so as not to interfere with the operations of other contractors, or he shall arrange his work with that of the others in an acceptable and coordinated manner and shall perform it in proper sequence to the complete satisfaction of Engineer-in-Charge. The contractor shall be responsible for any damage due to hindrance caused by him.
- 1.10 All the material related to the work execution shall be approved by Engineer-In-charge.
- 1.11 Any cement slurry added over base surface for bond or for continuation of concreting, for protecting reinforcement bars, its cost shall be deemed to have been included in the respective items, unless specified otherwise and nothing extra shall be payable nor extra cement shall be considered in the cement consumption on this account.
- 1.12 Stacking of materials and excavated earth including its disposal shall be done as per the directions of the Engineer-in-Charge. Double handling of materials or excavated earth if required at any stage shall have to be done by the contractor at his own cost.
- 1.13 No claim for idle establishment & labour, machinery & equipments, tools & plants and the like, for any reason whatsoever, shall be admissible during the execution of work as well as after its completion.
- 1.14 Only Stainless Steel screws shall be used unless otherwise specified.
- 1.15 Work shall be carried out in professional manner with finished product serving the intended purpose with specified strength, durability and aesthetics.

- 1.16 Work activities shall be executed in well thought out sequences such that consequent activities not adversely affecting previously done work. Nothing extra shall be payable to protect the works already done.
- 1.17 The contractor shall prepare all the needed shop drawings well in advance and get them approved before placing the order and execution of the item.
- 1.18 Contractor shall be able to claim bill only after issuing site clearance certificate from Junior Engineer & Assistant Engineer.
- 1.19 Contractor shall submit all material in store which is to be consumed according to specifications during execution of work. It will be further issued by concerned JE and AE according to daily requirement.
- 1.20 All materials to be used during work shall be got approved from engineer in charge.
- 1.21 All samples of material shall be got approved from engineer in charge before execution of work.
- 1.22 The contractor(s) shall inspect the site of work before tendering and acquaint himself with the site conditions and **no claim on this account** shall be entertained by the department.
- 1.23 The tender shall see the approaches to the site. In case any approach from main road is required at or existing approach is to be improved and maintained for cartage of materials by the contractor, the same shall be provided, improved and maintained by the contractor at his own cost.
- 1.24 Contractor shall take all precautionary measures to avoid any damage to adjoining property. All **necessary arrangement shall be made at his own cost.** Any damage caused by the contractor to the contractor to existing building/ installation / roads / boundary walls shall be made good by him (the contractor) at his own cost.
- 1.25 The contractor shall take all precautions to avoid accidents by exhibiting necessary caution board day and night, speed limit, red flags, red lights and proving barriers. He shall be responsible for all damages and accidents caused to existing / new work due to negligence on his part. No hindrances shall be caused to traffic, running of hospital services during the execution of the work.
- 1.26 Royalty at the prevailing rates whenever payable shall have to be paid by the contractor on the boulders, metal, shingle, sand and bajri etc. Or any other material collected by him for the work direct to revenue authorities and **the department shall pay nothing extra for the same**.
- 1.27 The contractor shall provide at his own cost suitable weighing, surveying and levelling and measuring arrangements as may be necessary at site for checking. All such equipment shall be got calibrated in advance from laboratory, approved by the Engineer-In-Charge. Nothing extra shall be payable on this account.
- 1.28 Contractor shall provide permanent bench mark, flags tops and other reference points for the proper execution of work and these shall be preserved till the end of work. All such reference points shall be in relation to the level and location, given in the Architectural and plumbing drawings.
- 1.29 Water tanks, taps, sanitary, water supply and drainage pipes, civil fittings and accessories should confirm to byelaws and municipal body / corporation where CPWD specifications are not available. The contractor should engage licensed plumbers for the work and get the materials (fixture /fittings) tested by municipal Body / Corporation authorities wherever required at his own cost.
- 1.30 The contractor shall give performance test of the entire installations as per the standing specifications before the work is finally accepted and completion certificate is recorded by the Engineer- In -Charge. Nothing extra whatsoever shall be payable to the contractor for the test.
- 1.31 Any cement slurry added over base surface for the continuation of concreting for better bond is deemed to have been included in the items and nothing extra shall be payable on this account, also the cement consumed on this account shall not be considered in theoretical consumption.

For RCC work, only factory made round type cover block shall be used.

26

- 1.32 The contractor shall bear all incidental charges for cartage, storage and safe custody of materials bought to site.
- 1.33 The work shall be carried out in accordance with the Architectural drawings and structural drawings, to be issued from time to time, by the Engineer-In-Charge. Before commencement of any item of work, the contractor shall correlate all the relevant architectural and structural drawings issued for the and satisfy himself that the information available there from is complete and unambiguous.

The discrepancy, if any, shall be brought to the notice of the Engineer-In-Charge before execution of the work. The contractor alone shall be responsible for any loss or damage occurring by the commencement of the work on the basis of any erroneous and or incomplete information.

- 1.34 Other agencies will also simultaneously execute and install the works of internal electrical installations, sub- station / generating sets, air- conditioning, lifts, etc. for the work and the contractor shall afford necessary facilities for the same. The contractor shall leave such recesses, holes, openings trenches etc. as may be required for such related works (for which inserts, sleeves, brackets, conduits, base plates, clamps etc. Shall be supplied free of cost by the department unless otherwise specifically mentioned) and the contractor shall fix the same at the time of casting of concrete, stone work and brick work, if required, and **nothing extra shall be payable on this account.**
- 1.35 All materials obtained from Govt. stores or otherwise shall be got checked by the Engineer-In-Charge or his any authorized supervisory staff on receipt of the same at site before use.
- 1.36 All material shall only be brought at site as per programme finalized with the Engineer-In-Charge. Any pre-delivery of the material not required for immediate consumption shall not be accepted and thus not paid for.
- 1.37 The architectural drawings given in the tender other than those indicated in nomenclature of the items are only indicative of the nature of the work and materials / fixtures involved unless otherwise specifically mentioned. However, the work shall be executed in accordance with the drawings duty approved by the Engineer-In –Charge. Architectural drawings are available in the office of Engineer-In-Charge and can be seen.
- 1.38 Normally contractors shall not be allowed to work at night. Work at night shall, however, be allowed if the site conditions / circumstances at night, no claim on this account shall be entertained. In such situations the contractor shall make available to the department proper means of transport such as vehicle at his own cost.
- 1.39 Existing drains, cables, pipes, over-head wires, sewer lines and similar services encountered in the course of execution of work shall be protected against the damage by the contractor's own expense. The contractor shall not store materials or otherwise occupy any part of the site in a manned likely to hinder the operation of such services. In no case such services should be stopped to the existing buildings.
- 1.40 The contractor shall be responsible for the watch and ward/ guard of the buildings, safety of all fitting and fixtures provided by him against pilferage and breakage during the period of installations and thereafter till the building is physically handed over to the department. No extra payment shall be made on this account.
- 1.41 The day to day receipt and issue accounts of different / brands of cement shall be maintained separately in the standard Performa by the Jr. Engineer of work and which shall be duly signed by the contractor or his authorized representative.
- 1.42 The contractor shall be fully responsible for the safe custody of materials brought by him issued to even though the materials are under double lock key system.
- 1.43 The contractor shall procure the required materials in advance so that there is sufficient time for testing of the materials and clearance of the same before use in the work. Any predelivery of the materials not required for immediate consumption shall not be resorted to. The contractor shall provide at his own cost suitable weighing and measuring arrangements at site for checking the weight / dimensions as may be necessary for execution of work.

- 1.44 No payment shall be made to the contractor for any damage caused by rain, floods, earthquake or any other natural causes whatsoever during execution of work. The contractor at his own cost will make the damages to the work good and no claim on this account shall be entertained.
- 1.45 For construction works which are likely to generate malba / rubbish to the tune of more than a truck load, contractor shall dispose of malba, rubbish & other unserviceable materials and **wastes at his own cost** to the notified specified dumping ground and under no circumstances these shall be stacked / dumped even temporarily, outside the construction premises.
- 1.46 Any damage done by the contractor to any existing work or work being executed by other agencies shall be made good by him at his own cost.
- 1.47 On the account of security consideration, there would be some restrictions, on the working hours, movement of vehicle for transportation of material and location of labour camp. The contractor shall be bound to follow all such restrictions and adjust the programme for execution of work.
- 1.48 The contractor shall also be required to follow the rules & restrictions imposed on working / movement/ stacking of materials by the local competent authority at all times. Nothing extra shall be payable on this account.
- 1.49 In case, there is any discrepancy between English version and corresponding Hindi version, if provided, then the provisions in English version will prevail.
- 1.50 The contractor will have to work as per schedule given by the Engineer-In-Charge.
- 1.51 The contractor shall remove all splashes from doors, windows and floors etc. if the contractor fails to remove the same 10% of gross value of the bills would be kept in deposit from each bill simultaneously.
- 1.52 The contractor submits the authenticated copies of itemized bills of the material which has to be entered in the M.A.S. Register viz steel, Cement, Bitumen, Paint water proofing material or any other item suggested by the technical sanction authority before settling payment.
- 1.53 The contractor shall pump the concrete wherever necessary to expedite the progress of work. Nothing extra shall be paid on this account.
- 1.54 Sample of building material, fitting and other articles required for execution of work shall be got approved from the Engineer-In-Charge before use in the work. The quantity of samples brought by the contractor shall be judge by standards laid down in the relevant BIS specification.
- 1.55 All material and fittings brought by the contractor to the site for use shall conform to the samples approved by the Engineer-In-Charge which shall be preserve till the completion of work. If a particular brand of material is specified in the item of work in schedule of quantity, the same shall be used after getting the same approved from Engineer-In-Charge. Wherever brand/quality of material is not specified in the items of work, the contractor shall submit the samples as per suggestive list of brand name given in the tender document /particular specifications for approval of Engineer-In-Charge. For all other items, materials and fitting carrying BIS mark shall be used with approval of Engineer-In-Charge. Wherever BIS marked material / fittings are not available, the contractor shall submit samples of material/fittings manufactured by firm of repute conforming to relevant specification or IS codes and use the same only after getting the approval of Engineer-In-Charge. To avoid delay, contractor should submit samples as stated above well in advance so as to give timely order for procurement. If any material, even though approved by Engineer-In-Charge is found defective or not conforming to specifications shall be replaced/removed by the contractor at his own risk and cost.
- 1.56 The contractor shall ensure quality construction in a planned and time in bound manner. Any sub-standard material/work beyond set-out tolerance limit shall be summarily rejected by the Engineer-In-Charge& contractor shall be bound to replace/ remove such sub-standard/defective work immediately.
- 1.57 BIS marked items (except cement and steel) required on the work shall be got tested. Only important tests shall be carried out. The frequency of such tests shall be 25% of the frequency specified in the CPWD specifications 2009 Vol. I to II with up to date correction slips. for certain items, if the frequency of test is not mentioned in CPWD specifications then relevant IS code shall be followed and tests shall be carried out @25% of frequency specified therein.

- 1.58 BIS marked materials except otherwise specified shall be subjected to quality test besides testing of other materials as per the specifications described for the item/material. Wherever BIS marked materials are brought to the site of work, the contractor shall furnish manufacturer's test certificate or test certificate from approved testing laboratory to establish that the material produced by the contractor for incorporation in the work satisfies the provisions of BIS codes relevant to the material and /or the work done.
- 1.59 Sample for testing –The contractor shall provide samples of materials required for testing free of charge. The cost of test shall be borne by the contractor / department in the manner indicate below: -
  - (a) By the contractor, if the results show that the material does not conform to relevant specifications.
  - (b) By the department, if the result show that the material conforms to relevant specifications. All other expenditure required to be incurred for talking samples, conveyance, packing etc. shall be borne by the contractor himself.
- 1.60 However, if any load testing or special testing is to be done for concrete whose strength is doubtful, the cost of the same shall be borne by the contractor.
- 1.61 All necessary tests as per the NIT/CPWD specifications/ relevant BIS codes shall be carried out on all the materials whether ISI marked or otherwise. Wherever NIT/CPWD specifications/relevant BIS Codes do not specify the frequency of tests, the same shall be carried out as per the directions of the engineer –in-charge. Nothing extra whatsoever shall be payable on this account.
- 1.62 The contractor shall ensure quality control measures on different aspects of construction methodologies to be adopted.
- 1.63 Lists of approved makes and brand of materials for civil works and sanitary works are annexed hereto. Makes and brands of materials specified therein shall only be used on the work. The contractor shall submit brand/ make of various materials to be used for the approval of Engineer-In-Charge along with samples.
- 1.64 All material shall be brought as per programme finalized with the Engineer-In-Charge. Any pre delivery of the material, not required for immediate consumption shall not be accepted and thus not paid for.
- 1.65 Samples including brand/quality of materials and fitting to be used in the work shall be got approved from the Engineer-In-Charge, well in advance of actual execution and shall be preserved till the completion of the work.
- 1.66 The rates for all items of work shall, unless clearly specified otherwise, include cost of all labor, material, tools, and plants and other inputs involved in the execution of the items and **nothing** extra shall be payable on this account.
- 1.67 The contractor shall quote all-inclusive rates against the items in the schedule of quantities and **nothing extra shall be payable for any of the conditions and specifications** mentioned in the tender document unless specially specified otherwise.
- 1.68 Unless otherwise specified in the schedule of quantities, the rates for all items, shall be considered as inclusive of pumping / bailing out water wherever necessary for which **no extra payment shall be made.**
- 1.69 The rate for all items, in which the use of cement is involved is inclusive of charges for curing.
- 1.70 The foundation trenches shall be kept free from water work below ground level are in progress.
- 1.71 The contractor shall indemnify the Govt. against any claims or obligation rising out of any damage to adjacent property, structure or to building work done by him.
- 1.72 In case service are encountered during excavation /earth work and such services are required to be shifted, the contractor is bound to carry out the shifting operation as per guidance/ instructions and with the approval of the Engineer-In-Charge. However, necessary payments shall be made in this regard as per provision of the agreement.
- 1.73 Many other agencies would be executing work simultaneously at site. The contractor shall maintain proper co-ordination with other agencies in maintaining progress of work. In case of any dispute, the decision of the Engineer-In-Charge shall be final and binding.
- 1.74 LABOUR CESS @ 1% OF THE GROSS VALUE OF THE WORK DONE WIL BE DEDUCTED FROM EACH RUNNING & FINAL BIL AS PER GOVT. NOTIFICATION.

#### 1.75 RECOVERY FOR WATER @ 1% OF THE GROSS VALUE OF WORK DONE SHALL BE MADE FROM THE BILL.

- 1.76 THE CONTRACTOR COMPLIES WITH THE INSTRUCTION CONTAINED TO DPCC OREDER FOLLOWS:-
  - (a) The dismantle material /building rubbish received from dismantling/demolishing shall be dumped to the dumping ground in properly covered truck with precaution.
- 1.77 The agency has to deposit 50% of paint material before the start of work at site calculated as per theoretical consumption calculated.

### 2.0 <u>CONDITION FOR CEMENT</u>: -

2.1 The Contractor shall procure 43 grade Ordinary Portland cement (conforming to IS : 8112) or Portland slag cement (conforming to IS : 455) or Portland Pozzolana Cement (PPC) (Fly ash based) – conforming to IS : 1489 (Part-I) as required in the work, from reputed manufactures of cement such as ACC, Ultratech, Vikram, Shree Cement, Ambuja, Jaypee Cement, Century Cement & J.K. Cement or from any other reputed cement Manufacturer having a production capacity not less than one million tons per annum.

The tenderers may also submit a list of names of cement manufacturers which they propose to use in the work. The tender accepting authority reserves right to accept or reject name(s) of cement manufacture(s) which the contractor proposes to use in the work. No change in the tendered rates will be accepted if the tender accepting authority does not accept the list of cement manufactures, given by the tenderer, fully or partially.

Supply of cement shall be taken in 50 Kg bags bearing manufacture's name, batch No. & ISI marking. Samples of cement arranged by the contractor shall be taken by the Engineer-in-charge and got issue in accordance with provisions of relevant BIS codes. In case test results indicate that the cement arranged by the Contractor does not conform to the relevant BIS codes, the same shall stand rejected and shall be removed from the site by the Contractor at his own cost within a week's time of written order from the Engineer-in-charge to do so.

If Portland Pozzolana cement or Portland slag cement is used, suitable modification in deshuttering time etc. shall be done if need be as per specifications and standards and as directed by Engineer - in - charge and nothing extra shall be payable on this account.

No extra payment / deduction shall be made from the payment to the contractor for using any of the above type of cement.

- 2.2 The cement shall be brought at site in bulk supply of approximately 50 tonnes or as decided by the Engineer in charge.
- 2.3 For each grade / type, cement bags shall be stored in two separate godowns, one for tested cement and the other for fresh cement (under testing) constructed by the contractor at site of work as per sketch shown in General conditions of contract for CPWD works 2020 with weather proof roofs and walls, for which no extra payment shall be made. The size of the cement godown is indicated in the sketch for guidance only. The actual size of godown shall be as per site requirements and as per the direction of the Engineer in charge and nothing extra shall be paid for the same. The decision of the Engineer-in-charge regarding the capacity required/needed will be final. However, the capacity of each godown shall not be less than 100 tonnes. Each godown shall be provided with a single door with two locks. The keys of one lock shall remain with CPWD Engineer-in-charge or his authorized representative and that of other lock with the contractor at the site of work so that the cement is issued from godown according to the daily requirement with the knowledge of both the parties. The account of daily receipt and issue of cement shall be maintained in a register in the prescribed Proforma and signed daily by the contractor or his authorized agent in token of its correctness.
- 2.4 The cement shall be got tested by Engineer –in –charge and shall be used on the work only after satisfactory test results have been received. The contractor shall supply free of charge the cement required for testing including its transportation cost to testing laboratories. The cost of tests shall be borne by the contractor / Department in the manner indicated below: -

(a) By the contractor, if the results show that the cement does not conform to relevant BIS codes.

- (b) By the Department, if the results show that the cement conforms to relevant BIS codes.
- 2.4.1 All other charges of sampling, packing and transportation of sample shall also be borne by the contractors.
- 2.5 The actual issue and consumption of cement on work shall be regulated and proper accounts maintained separately for each type of cement, as provided in clause 10 of the contract. The theoretical consumption of cement shall be worked out as per procedure prescribed in Clause 42 of the contract and shall be governed by conditions laid therein. However, for consumption lesser beyond permissible theoretical variation recovery shall be made in accordance with conditions of contract at Schedule A to F (CPWD-7), without prejudice to action for acceptance of work/item at reduced rate or rejection as the case may be. In case of excess consumption, no adjustment shall be made.

(i) Cement brought to site and cement remaining unused after completion of work shall not be removed from site without return permission of the Engineer-in-charge.

(ii) Damaged cement shall be removed from the site immediately by the contractor on receipt of notice in written. In case if he does not do within three days or receipt of same notice, the Engineer-in-charge shall get removed at the site of the contractor.

# 2.6 Cement brought to site and cement remaining unused after completion of work shall not be removed from site without written permission of the Engineer-in-charge.

#### 3.0 CONDITIONS FOR REINFORCEMENT STEEL: -

3.1 The contractor shall procure TMT bars of Fe 415 / Fe 415D / Fe 500/ Fe 500D / Fe 550 / Fe 550D grade from primary producers such as SAIL, Tata Steel Ltd., RINL, Jindal Steel & Power Ltd. and JSW Steel Ltd. or any other producer as approved by CPWD who are using iron ore as the basic raw material / input and having crude steel capacity of 2.0 Million tonnes per annum and above.

In case of non-availability of steel from primary producers, use of TMT reinforcement bars procured from secondary producers will be allowed subject to fulfillment of following conditions:

- a. The grade of the steel such as Fe-415 / Fe 415D / Fe 500D / Fe 550D / Fe 550D or other grade to be procured is to be specified as per BIS: 1786 2008.
- b. The secondary producers must have valid BIS license to produce HSD bars conforming to IS 1786: 2008. In addition to BIS license, the secondary producer must have valid license from either of the firms Tempcore, Thermex, Evcon Turbo & Turbo Quench to produce TMT Bars.
- c. The TMT bars procured from primary producers and ISPs shall conform to manufacture's specifications.
- d. The TMT bars procured from secondary producers shall conforms to the specifications as laid down by Tempcore, Thermex, Evcon, Turbo and Turboquench as the case may be.
- e. TMT bars procured either from primary producers or secondary producers, the specifications shall meet the provisions of IS 1786: 2008 pertaining to Fe 415 / Fe 415D / Fe 500 / Fe 550 / Fe 550D or other grade of steel as specified in the tender.
- 3.2 Samples shall also be taken and got tested by the Engineer-in-Charge as per the provisions in this regard in relevant BIS codes. In case the test results indicate that the steel arranged by the contractor does not conform to the specifications as defined under para (c) & (d) above, the

same shall stand rejected, and it shall be removed from the site of work by the contractor at his cost within a week time or written orders from the Engineer-in-Charge to do so.

In case contractor is permitted to use TMT reinforcement bars procured from secondary producers then:

(i) The base price of TMT reinforcement bars as stipulated under schedule 'F' shall be reduced by Rs. 6700/- MT. However, for operation of provisions of clause 10CA in such case, the indices for TMT reinforcement bars of secondary producers will be considered same as for primary producers.

(ii) The rate of providing & laying TMT reinforcement bars as quoted by the contractor in the tender shall also be reduced by Rs. 8.00 per kg.

- 3.3 The steel reinforcement bars shall be brought at site in bulk supply of 25 tonnes or more as decided by the Engineer in charge.
- 3.4 The steel reinforcement bars shall be stored by the contractor at site of work in such a way as to prevent distortion and corrosion and nothing extra shall be paid on this account. Bars of different sizes and lengths shall be stored separately to facilitate easy counting and checking.
- 3.5 For checking nominal mass tensile strength bend test re-bend test etc. specimen of sufficient length shall be cut from each size of the bar at random at frequency not less than that specified below:

Dia of bar	For consignment below	For consignment above 100tones
	100tones	
Under 10 mm	One sample for each 25 tonnes	One sample for each 40tonnes or
	or part thereof	part thereof
10 mm to	One sample for each 35 tonnes	One sample for each 45tonnes or
16mm	or part thereof	part thereof
Over 16mm	One sample for each 45 tonnes	One sample for each 50tonnes or
	or part thereof	part thereof

- 3.6 The contractor shall supply free of charge the steel required for testing including its transportation to testing laboratories. The cost of tests shall be borne by the contractor.
- 3.7 All other charges of sampling, packing and transportation of sample shall also be borne by the Contractor.
- 3.8 The actual issue and consumption of steel on work shall be regulated and proper accounts maintained as provided in clause 10 of the contract. The theoretical consumption of steel shall be worked out as per procedure prescribed in clause 42 of the contract and shall be governed by conditions laid therein. In case the consumption is less than theoretical consumption including permissible variations, recovery at the rate so prescribed shall be made. In case of excess consumption no adjustment need to be made.
- 3.9 Steel brought to site and remaining unused shall not be removed from site without the written permission of Engineer-in-Charge.
- 3.9(i) Reinforcement including authorized spacer bars and lap pages shall be measured in length for different diameters as actually (not more than as specified in the drawings) used in the work nearest to a centimeter. Wastage and unauthorized overlaps shall not be measured.

(ii) The standard sectional weights referred to shall be as in Table 5.4 in para 5.3.4 in revised CPWD specifications 2009 Vol. I will be considered for conversion of length of various sizes of TMT bars in to standard weight.

(iii) Record of actual sectional weights shall also be kept dia wise and lot wise. The average sectional weight for each diameter shall be arrived at from samples from each lot of steel received at site. The decision of the Engineer in charge shall be final for the procedure to be followed for determining the average sectional weight of each lot. Quantity of each diameter of steel received at site of work each day will constitute one single lot for the purpose. The weight of steel by conversion of length of various sizes of bars based on the actual weighted average sectional weight shall be termed as Derived Actual Weight.

(a) If the derived weight as in sub-para (iii) above is less than the standard weight as in sub-para (ii) above, then the Derived Actual Weight shall be taken for payment.

(b) If the derived actual weight is found more than the standard weight, than standard weight as worked out in sub para (ii) above shall be taken for payment. Nothing shall be paid extra for the difference in Derived/ Actual Weight and standard weight.

The contractor has to obtain vouchers and furnish test certificate to the Engineer-in-charge in respect of all the lots of Steel brought by him from approved suppliers at the site of work.

3.10 Every care should be taken to avoid mixing different types of grades of bars in the same structural members as main reinforcement to satisfy relevant clause of IS: 456. In case of buildings, wherever the situation necessitates, the changeover shall be permitted only from any one level onwards. In case of foundations, all foundation elements (footings and grade beams) shall have the same kind of steel. In the case of columns, all structural elements up to the level of change, where the changeover is taking place should have the same kind of steel as those in columns.

3.11 The reinforcing steel brought to site of work shall be stored on brick / timber platform of 30 / 40 - cm height, nothing extra shall be paid on this account.

#### 4.0 SAFETY MEASURES AT CONSTRUCTION SITE

In order to ensure safe construction, following shall be adhered for strict compliance at the site: -

- (i) The work site shall be properly barricaded.
- (ii) Adequate signage's indicating 'Work in Progress Inconvenience caused is Regretted' or Diversion Signs shall be put on the sites conspicuously visible to the public even during night hours. These are extremely essential where works are carried out at public places in use by the public.
- (iii) The construction malba at site shall be regularly removed on daily basis.
- (iv) All field officials and the workers must be provided with safety helmets, safety shoes and safety belts.
- (v) Proper MS pipe scaffoldings with work platforms and easy-access ladders shall be provided at site to avoid accidents.

Necessary First-Aid kit shall be available at the site.

The above provisions shall be followed in addition to the provisions of General Condition of Contract.

**5.0 SPECIFICATIONS FOR FLY ASH BRICKS -** All fly ash bricks as brought to the site shall conform to the strength & durability parameters as prescribed in the tender and CPWD specifications.

6.0 The contractor shall submit 'Method Statement' for the approval soon after the award of work. 'Method Statement' is a statement by which the construction procedures for important activities of construction are stated, checked and approved. Method Statement shall have description of the item with elaborate procedures in steps to implement the same. The specification of the materials involved their testing and acceptance criteria, equipments to be used, precautions to be taken, mode of measurements etc.

#### 6.1 Formwork for exposed concrete surfaces: -

6.1.1 Where it is specifically shown on the drawings to have original fair face finish of concrete surface without any rendering of plastering, formwork shall be carried put by using plywood on steel plates of approved quality.

6.1.2 The forms shall be constructed so as to produce a uniform and consistent texture and pattern on the face of the concrete. The formwork shall be placed so that all horizontals are constructed of lumber and are not paneled and the formwork joints shall be staggered.

6.1.3 To achieve a finish which shall be free of board marks, the formwork shall be faced with plywood or equivalent material in large sheets. The sheets shall be arranged in an approved pattern. Whenever possible, joints between sheets shall be arranged to coincide with architectural feature, sills, window heads or change in direction of surface. All joints between panels shall be vertical or horizontal unless otherwise directed. Suitable joints shall be approved between sheets. The joints shall be arranged and fitted so that no blemish or mark is imparted to the finished surfaces.

6.1.4 Forms for exposed concrete surfaces shall be constructed with grade strips (the underside of which indicate top of pour) at horizontal constructions joints, unless the use of groove strips is specified on the drawings. The reset forms shall be tightened against the concrete so that the forms will not be spread and permit abrupt irregularities or loss of mortar. Supplementary form ties shall be used as necessary to hold the reset forms tight against the concrete.

6.1.5 For fair faced concrete, the position of through bolts will be restricted and generally as indicated on the drawings.

6.1.6 Plywood and steel plates used in the formwork for obtaining exposed surfaces shall be got approved from Engineer-in-charge on each use. However, no forms will be allowed for reuse if it is doubtful to produce desired texture of exposed concrete.

6.1.7 Cement of only approved shade shall be used preferably of single lot to achieve integrity of texture.

#### 6.2 Class of Surface Finish: -

6.2.1 For Beams & Slabs:

The finish shall be uniform, dense and smooth. no grout, no grain pattern, no crazing and no major blemishes shall be permitted. Abrupt irregularities not exceeding 3mm and gradual irregularities less than 5mm in 2m length only shall be permitted.

6.2.2 For Columns/Wall/Fins:

The finish shall be uniform and smooth leveling the surface of the compacted concrete shall be done with a screed board with power floating the surface and over that steel trowelling the surface under firm pressure characteristics of finish shall be brush marks < 3mm gradual irregularities less than 10mm in 2m.

#### 6.3 Tolerance in Finished Concrete: -

The formwork shall be so made as to produce a finished concrete true to shape, lines, level, plumb and dimensions as shown in the drawings subject to the following tolerance unless otherwise specified in this specification or drawings.

#### 6.4 WALL/COLUMN/FINS:

21.4.1 Variation from the plumb

21.4.2 Variation from the plumb of	$\pm 6 \text{mm}$	Upto 6m height
conspicuous liner		
21.4.3 Variation in the size of	(+)15mm	
wall openings	(-) 6mm	

- 21.4.4 Variation in parapet wall thickness
- (a) Upto 30cm thickness  $\pm 6$ mm

### 6.5 SLAB, BEAM & GIRDER FORMS:

21.5.1 Variation from the level or from the specified grid for beam soffit before removal of shores,

(a) In any 3m	$\pm 6$ mm
(b) In any 6m	$\pm 10 \text{mm}$

All the tolerances mentioned above shall apply to concrete dimensions only, and not to positioning of vertical steel or dowels. The tolerances given above are specified for local aberration in the finished concrete surface and should not be taken as tolerance for the entire structure taken as whole for the setting and alignment of formwork. Any error, within the above tolerance limits, or any other if noticed in any of the structure after part or portion stripping of forms, shall be corrected in the subsequent work to bring back the structure to its true line, level and alignment.

### (SPECIMEN)

# (Ref. para 3.3 of Particular Specifications and Special conditions)

# GUARANTEE TO BE EXECUTED BY CONTRACTORS FOR REMOVAL OF DEFECT AFTER COMPLETION IN RESPECT OF WATER PROOFING WORKS

WHEREAS this agreement is supplementary to a contract (hereinafter called the Contract) dated ..... and made between the **GUARANTOR** of the one part and the Government of the other part, whereby the Contractor, inter alia, undertook to render the buildings and structures in the said contract recited completely water and leak – proof.

AND WHEREAS **GUARANTOR** agreed to give a guarantee to the effect that the said structures will remain water and leak-proof for ten years from the date of giving of water proofing treatment.

NOW THE **GUARANTOR** hereby guarantees that water proofing treatment given by him will render the structures completely leak-proof and the minimum life of such water proofing treatment shall be ten years to be reckoned from the date after the maintenance period prescribed in the contract.

Provided that the guarantor will not be responsible for leakage caused by earthquake or structural defects or misuse of roof or alteration and for such purpose;

- (a) Misuse of roof shall mean any operation which will damage water proofing treatment, like chopping of firewood and things of the same nature which might cause damage to the roof;
- (b) Alteration shall mean construction of an additional storey or a part of the roof or construction adjoining to existing roof whereby proofing treatment is removed in parts;
- (c) The decision of the Engineer-in-charge with regard to cause of leakage shall be final.

During this period of guarantee the **guarantor** shall make good all defects and in case of any defect being found, render the building water –proof to the satisfaction of the Engineer-in-Charge at his cost, and shall commence the work for such rectification within seven days from the date of issue of the notice from the Engineer-in-Charge calling upon him to rectify the defects, failing which the work shall be got done by the Department by some other contractor at the **GUARANTOR'S** cost and risk. The decision of the Engineer-in-Charge as to the cost, payable by the **Guarantor** shall be final and binding.

That if **GUARANTOR** fails to execute the water proofing or commits breach thereunder then the **GUARANTOR** will indemnify the Principal and his successors against all loss, damage, cost, expense or otherwise which may be incurred by him by reason of any default on the part of the **GUARANTOR** in performance and observance of this supplementary agreement. As to the amount of loss and / or damage and / or cost incurred by the Government the decision of the Engineer – in – Charge will be final and binding on the parties.

IN WITNESS WHEREOF these presents have been executed by the Obligor ..... and by ..... and for and on behalf of the Executive Director, AIIMS Rishikesh on the day, month and year above written.

Signed, sealed and delivered by OBLIGOR in the presence of -

1. ..... 2. .....

Signed for and on behalf of the Executive Director, AIIMS Rishikesh by .....in the presence of -

1. ..... 2. ....

#### LIST OF APPROVED MATERIALS (CIVIL)

- Note :
  - 1. Unless otherwise specified, the brand/make of the material as specified in the item nomenclature or in the particular specifications or in the list of approved materials attached in the tender, shall be used in the work.
  - 2. The Contractor shall obtain prior approval from the Engineer-in-charge before placing order for any specific material/ Brand/ Make.
  - 3. Whenever the specified brand of material is not available than, the Engineer-in-charge may approve any material equivalent to that specified subject to proof being offered by the Contractor for its equivalence and its non-availability to his satisfaction.

	MATERIALS:	BRAND/MAKE
1	AAC Block	Aerocon, Siporex, Ultratech, Ecolite, Concrelite, J.K. Laxmi (Cement
		Ltd.), BILTECH, Kansal, Dlite Blocks
2	AAC Block Adhesive	Ferrous crete(Ferro-1188), ARDEX ENDURA (White Star), Ultratech
-		(Fixed-Block)
3	Acrylic Distemper, Emulsion, Synthetic	Asian Paints, ICI Dulux, Berger, Nerolac
5	Enamel Paint and Primer.	Asian Familis, Ter Dulux, Derger, Werolde
4	Epoxy Adhesive	FOSROC, Aquomix , Choksey, BAL-ENDURA, MYK Laticrete
5	Aluminium Composite Panel	Alpolic, Aluco Bond, Reynobond, Euro bond, Alstrong
6	Aluminium Extrusions	Hindalco, Indalco, Jindal
7	Aluminum Sections	Jindal, Hindalco, Indalco
8	Annealed Float Glass	Saint Gobain, Modi Guard, Asahi
9	Bitumen	Indian Oil, Hindustan Petroleum, Bharat Petroleum
10	Calcium Silicate Board / Tiles	Aerolite, Hilux, Starpan
11	CC Pavers / Grass Pavers	Nitco, Hindustan, Ultra, KJS Concrete, Duracrete, Mehtab Tiles, Kaptim
12	Centrifugally Cast Iron Pipe & Fittings	NECO, SKF, BIC, RIF, KAPILANSH, HIF
13	Ceramic Tiles	Kajaria, Nitco, Orient Bell, Johnson, RAK Ceramics
14	Chequered / Tactile Tiles	Dura, Eurocon, Modern, Hindistan, Johnson, Eavison
15	CI Manhole Cover	BIC, SKF, NICO, Hepco, Kapilansh, RIF
16	CI Double flanged non-return valves	Kirloskar, Sant, Kartar
17	CP fittings	Jaquar, Marc, Kohler, Grohe
18	CPVC Pipes & Fittings	Astral Flowguard, Ashirvad, Prince, Supreme, Finolex, VECTUS
19	Curtain Carrier / Drapery Rod	Marvel, Vista levlor, Johnson.
20	Dash fastener, Expansion Bolt	Hilti, Bosch Fischer
21	Hydraulic Door closer, Floor springs	Dorma, Hettich, Hafele, Geze
22	Ductile Iron Pipe (Water Supply)	Electro steel, Kesso, KDUPL, Electro Spun
23	EPDM Gasket	Hanu, Anand, Lescuyer
24	GRC / Tactile Tile	Unistone, Eurocon, Dazzle
25	Epoxy Grouting Compound	Pidilite, Ferrous Crete(Ferro-102), MYK LATICRETE, Fosrock
26	Epoxy Primer & Paints	Berger, Pidilite, CICO, BASF, SIKA, Fosrock
27	Fire Check door	Navair, Godrej, Shakti
28	Float Glass Mirror	Modifloat, Saint Gobain, Asahi
29	Flush Doors (ISI Mark only)	Century, Kitlam, Archid, Greenply, Marino, Duro, Gujcon
30	Friction Stay	Earl-Bihari, Geze, Hettich, Securistyle
31	Galvanized/Stainless Steel Anchor	Shakti, Arrow, Hilti, Fischer
	Fasteners	
32	GI Pipe & fittings	Tata, Zenith, Jindal, Prakash Surya, Swastik; (ISI Marked only)
33	GI Sheet	Sail, TATA, Jindal or equivalent
34	Gun Metal Gate Valve	Zoloto, Leader, SANT, Prima
35	Glass Mosaic Tile	Bisazza, Italia, Palladio, Mridul
36	Gypsum Board (False Ceiling)	Boral Gypsum, India Gypsum, St. Gobain
37	Hardener	Hardcrete of Snowcem India, Pidilite, CICO.
38	HDPE Pipes	VECTUS, Emco, Polyfins, Pioneer, Plyfab
39	Jet Assembly for EWC/Health Faucet	Parryware, Jaquar, Marc, PRIMA(ISI)
40	Kitchen loft tank	Sintex, Tirupati Structurals Ltd, KMS Plast world P.Ltd. Planet Plastics,
40	KIUIUII IOII IAIIK	
<u>/ 1</u>	Lominate and V	Sri Kamakshi Traders, Sreyah Novel InC.
41	Laminate and Veneers	Merino, Greenlam, Kitlam, Duro
42	Locks / Latch	Godrej, Harrision, Dorma, Doorset (ISI)
43	Marine Plywood / BWP Ply	Duro, Century, Greenlam
44	Melamine Polish	Asian Paints, Pidilite, ICI Dulux, Burger
45	Metal False Ceiling	Nitobond, Armstrong, Trac, Durlum, Lafarge, Anutone
46	Mineral Fibre/ GRG Ceiling	Armstrong, Daiken, Anutone, Diamond, Credence
47	M.S. Pipe (Railing)	Jindal, Tata, RINL, Prakash Surya
48	M.S. Tubes	Tata, Apolo, Prakash Surya
49	Multicoat Synthetic Plaster/ Textured	Spectrum, Heritage, Ultratech
	Exterior wall paint	
50	Plywood, Block Board	Greenply, Century, Duro
51	Polycarbonate Sheet	Danpalon (DPI), Bayer, Macrolux
52	Polysulphide / Silicon Sealent	Pidilite, Fosroc, Tuffseal, Chouksey Chemicals, Perma, BASF
53	POP (Plaster of paris)	JK, Laxmi, Sriram Nirman, Sakarni
54	PPR Pipes	SFMC, SAFE, Poineer Industries
51	***** iPeo	State, State, to move incontrol

55	Precast CC interlocking Tiles	Hindustan, Paver India, KK
56	Precoatd Profile Sheet	Tata, Bhushan or equivalent
57	Pre-laminated Particle Board	Ecoboard, Action-Tesa, Duro, Century Ply, Greenlam, Albihari
58	Pressed steel door frame	M/s Engineers & Fabricator, Raipur, M/s J.K. Enternprises, Jaipur,
		M/s Jangid Engineering Works, Jaipur, M/s Swastik Super Industries,
		Mohali, M/s SKS Steel Industries, New Delhi.
59	PTMT Fittings	Prayag, Polytuf, Pearl, Millennium, PRIMA
60	PVC Cistern	Steelbird, Jindal, Seabird, Prayag, Commander
61	PVC Connection Pipe	Supreme, Prince, Finolex
62	PVC Rain Water Pipe & Fitting	Finolax, Kisan, Kasta, Supreme, Astral, Prince
63	Ready Mix Concrete (RMC)	Lafarge, Alchon, ACC, L&T, Grasim, Ultratech, RMC India
64	Ready Mix plaster	Ultratech, Precisecon Chem, Perma, Ferrous Crete, JK, Fosrock,
65	PVC Shutter	Polygreen, Rajshri, Plastogreen, Sintex
66	PVC Water storage Tank (Only ISI)	VECTUS, Water well, Plasto, Polycon, Sintex. (Weight as per ISI)
67	Sluice Valve	Kirloskar, Venus, Kalpana, SANT, KARTAR, Zolto
68	Solid PVC frames and shutters	Polygreen, Rajshri, Plastogreen, Sintex
69	Stainless Steel	Jindal, Salem or equivalent
70	Stainless steel Sink with or without	Nirali, Hindware, Frankee, Neelkanth, Jaquar
	Draining board.	
71	Stainless steel Door/Window fittings &	Dorma, Ozone, D-Line, Hettich, Kich, Geze
	Fixtures	
72	Structural steel section	TATA, SAIL, RINL, Jindal
73	Super plasticizer / admixture	Sika, Fosroc, Chouksey Chemicals, BASF
74	Tensile Fabric	Bluestone, Encon, Structure Flex
75	Tile Adhesive	Ferrous Crete(Ferro-1122), Ardex Endura (Gold Star), PIDILITE
		(Fevimate XL), WEABR(Saint-Gobin) Sika, Thermoshield, Somany
76	Towel Ring/Towel Rod/Towel Rack	Marc, Jaquar, Kolher, Grohe
77	Tubular steel Window, ventilator, Door	M/s Engineers & Fabricator, Raipur, M/s J.K. Enterprises, Jaipur, M/s
	frame	Swastik Super Industries, Mohali (Punjab) M/s Jangid Engg. Jaipur
78	UPVC Pipes & Fittings	Astral Flowguard, Ashirvad, Prince, Supreme, Finolex, VECTUS
79	Urinal, Washbasin, Orrisa Pattern W.C.,	Hindware, Parryware, Jaquar, Cera, Kolher, Grohe
	Wall mounted European W.C.Seat with	
	Cistern	
80	Vitrified Tile	Johnson -Marbonite, Somany, Kajaria, Orient Bell, NITCO, RAK
81	Wall Putty	JK, BIRLA, SARAPUTTY
82	Waste Pipe	Kamal, Viking, Jaquar
83	Water Proofing Compound (Liquid)	Pidilite, Cico, Impermo
84	White Cement	JK White, Birla White, Grasim

# Schedule of Quantity

# Name of work: <u>Renovation of Toilets at AIIMS Rishikesh</u>

Sr No.	ltem	Unit	Qty	Rate	Amount
1	Dismantling W.C. Pan of all sizes including disposal of dismantled materials i/c malba all complete as per directions of Engineer-in- Charge.	each	4.00	117.707	470.83
2	Dismantling tile work in floors and roofs laid in cement mortar including stacking material within 50 metres lead. For thickness of tiles 10 mm to 25 mm	sqm	100.00	64.330	6433.00
3	Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-charge. In cement mortar	cum	11.00	1805.962	19865.58
4	Dismantling aluminium/ Gypsum partitions, doors, windows, fixed glazing and false ceiling including disposal of unserviceable material and stacking of serviceable material with in 50 meters lead as directed by Engineer-in-charge.	sqm	40.00	49.443	1977.72
5	Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply, including all CPVC plain & brass threaded fittings, including fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and testing of joints complete as per direction of Engineer in Charge. 20 mm nominal outer dia Pipes	meter	25.00	345.679	8641.98
6	<ul> <li>Providing and laying water proofing treatment in sunken portion of WCs, bathroom etc., by applying cement slurry mixed with water proofing cement compound consisting of applying :</li> <li>(a) First layer of slurry of cement @ 0.488 kg/sqm mixed with water proofing cement compound @ 0.253 kg/ sqm. This layer will be allowed to air cure for 4 hours.</li> <li>(b) Second layer of slurry of cement @ 0.242 kg/sqm mixed with water proofing cement compound @ 0.126 kg/sqm. This layer will be allowed to air cure for 4 hours.</li> <li>(b) Second layer of slurry of cement @ 0.242 kg/sqm mixed with water proofing cement compound @ 0.126 kg/sqm. This layer will be allowed to air cure for 4 hours followed with water curing for 48 hours. The rate includes preparation of surface, treatment and sealing of all joints, corners, junctions of pipes and masonry with polymer mixed slurry.</li> </ul>	sqm	60.00	549.301	32958.06
7	Providing and laying Vitrified tiles in wall/floor in different sizes (thickness to be specified by the manufacturer) with water absorption less than 0.08% and conforming to IS:15622, of approved brand & manufacturer, in all colours and shade, laid on 20 mm thick cement mortar 1:4 (1 cement: 4 coarse sand) jointing with grey cement slurry @3.3 kg/sqm including grouting the joints with white cement and matching pigments etc. The tiles must be cut with the zero chipping diamond cutter only . Laying of tiles will be done with the notch trowel, plier, wedge, clips of required thickness, leveling system and rubber	sqm	110.00	1714.837	188632.07

	mallet for placing the tiles gently and easily. Glazed vitrified tiles polished finish of size Size of Tile 600				
8	x 1200 mm Providing and laying Vitrified tiles in wall/floor in different sizes (thickness to be specified by the manufacturer) with water absorption less than 0.08% and conforming to IS:15622, of approved brand & manufacturer, in all colours and shade, laid on 20 mm thick cement mortar 1:4 (1 cement: 4 coarse sand) jointing with grey cement slurry @3.3 kg/sqm including grouting the joints with white cement and matching pigments etc. The tiles must be cut with the zero chipping diamond cutter only . Laying of tiles will be done with the notch trowel, plier, wedge, clips of required thickness, leveling system and rubber mallet for placing the tiles gently and easily. Glazed Vitrified tiles Matt/Antiskid finish of size Size of Tile 600 x 1200 mm	sqm	40.00	1714.837	68593.483
9	Providing & fixing false ceiling at all heights with GRG (Glass Fibre Reinforced Gypsum) false ceiling tiles of Size 595x595 mm of approved texture, design and patterns having moisture content less than 2%, humidity resistance of 99%, NRC 0.50 to 0.75 as per IS 8225:1987, Non combustible as per BS 476 (part 4)-1970 and light reflectance of 85% (minimum) to be laid in true horizontal level suspended on interlocking metal T-Grid of hot dipped galvanised iron section of 0.33mm thick (galvanized @ 120 grams per sqm including both sides) comprising of main-T runners of size 15x32 mm of length 3000 mm, cross - T of size 15x32 mm of length 1200 mm and secondary intermediate cross-T of size 15x32 mm of length 600mm to form grid module of size 600 x 600 mm, suspended from ceiling using galvanised mild steel items (galvanizing @ 80 grams per sqm) i.e. 50 mm long, 8 mm outer diameter M-6 dash fasteners, 6 mm dia fully threaded hanger rod upto 1000 mm length and L-shape level adjuster of size 85x25x2 mm. Galvanised iron perimeter wall angle of size 24x24x0.40 mm of length 3000 mm to be fixed on periphery wall / partition with the help of plastic rawl plugs at 450 mm center to center and 40 mm long dry wall wood screws. The work shall be carried out as per specifications, drawing and as per directions of the Engineer-in-Charge. With fully perforated 12 mm thick micro tegular edged or 10 mm thick square edged GRG false ceiling tiles.	sqm	40.00	1872.152	74886.092
10	Half brick masonry with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V	sqm	30	4002 402	
11	level. Cement mortar 1:4 (1 cement :4 coarse sand) Reinforced cement concrete work in walls (any thickness), including attached pilasters, buttresses, plinth and string courses, fillets, columns, pillars, piers, abutments, posts and struts etc. above plinth level up to floor five level, excluding cost of centering, shuttering, finishing and reinforcement : 1:1.5:3 (1 cement : 1.5 coarse sand(zone-III) derived from natural sources : 3 graded stone aggregate 20 mm nominal	cum	0.50	1082.493 10829.764	32474.777 5414.882

	size derived from natural sources)				
	Centering and shuttering including strutting,				
12	propping etc. and removal of form for Shelves (cast	sqm	5.00		
	in situ)			815.073	4075.36
	Steel reinforcement for R.C.C. work including				
	straightening, cutting bending, placing in position				
13	and binding all complete above plinth level.	kg	50.00		
	Thermo-Mechanically Treated bars of grade Fe-				
	500D or more			95.325	4766.24
	Providing and fixing 18 mm thick gang saw cut,				
	mirror polished, premoulded and prepolished,				
	machine cut for kitchen platforms, vanity counters,				
	window sills, facias and similar locations of				
	required size, approved shade, colour and texture				
14	laid over 20 mm thick base cement mortar 1:4 (1	sqm	10.00		
	cement : 4 coarse sand), joints treated with white				
	cement, mixed with matching pigment, epoxy				
	touch ups, including rubbing, curing, moulding and				
	polishing of edges to give high gloss finish etc. complete at all levels. Granite stone slab of colour				
	black, Cherry/Ruby red Area of slab over 0.50 sqm			4705.475	47054.75
	Providing edge moulding to 18 mm thick marble			4705.475	47054.75
	stone counters, Vanities etc., including machine				
15	polishing to edge to give high gloss finish etc.	meter	7.00		
10	complete as per design approved by Engineer-in-		7.00		
	Charge. Granite work			445.363	3117.54
	Providing and fixing floor mounted, white vitreous				
	china single piece, double traps syphonic water				
	closet of approved brand/make, shape, size and	each			
	pattern including integrated white vitreous china		2.00		
10	cistern of capacity 10 litres with dual flushing				
16	system, including all fittings and fixtures with seat				
	cover, cistern fittings, nuts, bolts and gasket etc				
	including making connection with the existing P/S				
	trap, complete in all respect as per directions of				
	Engineer-in-Charge.			17119.555	34239.11
	Providing and fixing water closet squatting pan				
	(Indian type W.C. pan ) with 100 mm sand cast Iron				
	P or S trap, 10 litre low level white P.V.C. flushing				
	cistern, including flush pipe, with manually				
17	controlleddevice (handle lever) conforming to IS :	each	2.00		
17	controlleddevice (handle lever) conforming to IS : 7231, with all fittings and fixtures complete,	each	2.00		
17	controlleddevice (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and	each	2.00		
17	controlleddevice (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required: White Vitreous china	each	2.00		
17	controlleddevice (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required: White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with	each	2.00	6147,309	12294.62
	controlleddevice (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required: White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests	each		6147.309	12294.62
17 18	<ul> <li>controlleddevice (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required: White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests</li> <li>12 mm cement plaster of mix : 1:6 (1 cement: 6</li> </ul>	each sqm	2.00		
	<ul> <li>controlleddevice (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required: White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests</li> <li>12 mm cement plaster of mix : 1:6 (1 cement: 6 fine sand)</li> </ul>			6147.309 299.851	12294.62 8995.53
	<ul> <li>controlleddevice (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required: White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests</li> <li>12 mm cement plaster of mix : 1:6 (1 cement: 6</li> </ul>				
18	<ul> <li>controlleddevice (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required: White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests</li> <li>12 mm cement plaster of mix : 1:6 (1 cement: 6 fine sand)</li> <li>15 mm cement plaster on the rough side of single</li> </ul>	sqm	30.00		
18	<ul> <li>controlleddevice (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required: White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests</li> <li>12 mm cement plaster of mix : 1:6 (1 cement: 6 fine sand)</li> <li>15 mm cement plaster on the rough side of single or half brick wall of mix : 1:6 (1 cement: 6 fine</li> </ul>	sqm	30.00	299.851	8995.53
18 19	<ul> <li>controlleddevice (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required: White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests</li> <li>12 mm cement plaster of mix : 1:6 (1 cement: 6 fine sand)</li> <li>15 mm cement plaster on the rough side of single or half brick wall of mix : 1:6 (1 cement: 6 fine sand)</li> <li>Providing and applying white cement based putty of average thickness 1 mm, of approved brand and</li> </ul>	sqm sqm	30.00 30.00	299.851	8995.53
18	<ul> <li>controlleddevice (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required: White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests</li> <li>12 mm cement plaster of mix : 1:6 (1 cement: 6 fine sand)</li> <li>15 mm cement plaster on the rough side of single or half brick wall of mix : 1:6 (1 cement: 6 fine sand)</li> <li>Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to</li> </ul>	sqm	30.00	299.851 344.828	8995.53 10344.84
18 19	<ul> <li>controlleddevice (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required: White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests</li> <li>12 mm cement plaster of mix : 1:6 (1 cement: 6 fine sand)</li> <li>15 mm cement plaster on the rough side of single or half brick wall of mix : 1:6 (1 cement: 6 fine sand)</li> <li>Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete</li> </ul>	sqm sqm	30.00 30.00	299.851	8995.53
18 19 20	<ul> <li>controlleddevice (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required: White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests</li> <li>12 mm cement plaster of mix : 1:6 (1 cement: 6 fine sand)</li> <li>15 mm cement plaster on the rough side of single or half brick wall of mix : 1:6 (1 cement: 6 fine sand)</li> <li>Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete</li> <li>Wall painting with acrylic emulsion paint of</li> </ul>	sqm sqm	30.00 30.00 50.00	299.851 344.828	8995.53 10344.84
18 19	<ul> <li>controlleddevice (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required: White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests</li> <li>12 mm cement plaster of mix : 1:6 (1 cement: 6 fine sand)</li> <li>15 mm cement plaster on the rough side of single or half brick wall of mix : 1:6 (1 cement: 6 fine sand)</li> <li>Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete</li> <li>Wall painting with acrylic emulsion paint of approved brand and manufacture to give an even</li> </ul>	sqm sqm	30.00 30.00	299.851 344.828 131.690	8995.53 10344.84 6584.50
18 19 20	<ul> <li>controlleddevice (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required: White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests</li> <li>12 mm cement plaster of mix : 1:6 (1 cement: 6 fine sand)</li> <li>15 mm cement plaster on the rough side of single or half brick wall of mix : 1:6 (1 cement: 6 fine sand)</li> <li>Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete</li> <li>Wall painting with acrylic emulsion paint of approved brand and manufacture to give an even shade : Two or more coats on new work</li> </ul>	sqm sqm sqm	30.00 30.00 50.00	299.851 344.828	8995.53 10344.84
18 19 20	<ul> <li>controlleddevice (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required: White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests</li> <li>12 mm cement plaster of mix : 1:6 (1 cement: 6 fine sand)</li> <li>15 mm cement plaster on the rough side of single or half brick wall of mix : 1:6 (1 cement: 6 fine sand)</li> <li>Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete</li> <li>Wall painting with acrylic emulsion paint of approved brand and manufacture to give an even</li> </ul>	sqm sqm sqm	30.00 30.00 50.00	299.851 344.828 131.690	8995.53 10344.84 6584.50

	bore				
23	Providing and fixing C.P. brass angle valve for basin mixer and geyser points of approved quality conforming to IS:8931	each	20.00	532.022	10640.44
24	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level :1:5:10 (1 cement : 5 coarse sand (zone-III) derived from natural sources : 10 graded stone aggregate 40 mm nominal size derived from natural sources)	cum	0.50	6433.656	3216.83
25	Providing and fixing P.V.C. waste pipe for sink or wash basin including P.V.C. waste fittings complete. Flexible pipe 32 mm dia	each	10.00	110.955	1109.55
26	Providing and fixing pressed steel door frames conforming to IS: 4351, manufactured from commercial mild steel sheet of 1.60 mm thickness, including hinges, jamb, lock jamb, bead and if required angle threshold of mild steel angle of section 50x25 mm, or base ties of 1.60 mm, pressed mild steel welded or rigidly fixed together by mechanical means, including M.S. pressed butt hinges 2.5 mm thick with mortar guards, lock strike-plate and shock absorbers as specified and applying a coat of approved steel primer after pre- treatment of the surface as directed by Engineer- in-charge: Profile B Fixing with carbon steel galvanised dash fastener of required dia and size (to be paid for separately)	meter	15.00	460.568	6908.52
27	Providing and fixing ISI marked flush door shutters conforming to IS : 2202 (Part I) non-decorative type, core of block board construction with frame of 1st class hard wood and well matched commercial 3 ply veneering with vertical grains or cross bands and face veneers on both faces of shutters: 30 mm thick including ISI marked Stainless Steel butt hinges with necessary screws	sqm	8.00	2001.077	16008.62
28	Providing and fixing uplasticised PVC connection pipe with brass unions : 45 cm length 15 mm nominal bore	each	20.00	90.593	1811.86
29	providing and fixing Flush pipe with union spreaders and clamps all in C.P. brass for double stall	each	6.00	451.903	2711.42
30	Providing and fixing mirror of superior glass (of approved quality) and of required shape and size with plastic moulded frame of approved make and shade with 6 mm thick hard board backing : Rectangular shape 1500x450 mm	each	3.00	1932.229	5796.69
31	Providing and fixing aluminium die cast body tubular type universal hydraulic door closer (having brand logo with ISI, IS : 3564, embossed on the body, door weight upto 35 kg and door width upto 700 mm), with necessary accessories and screws etc. complete	each	2.00	1090.574	2181.15
32	Providing and fixing uPVC SWR pipes conforming to IS:13592-92 Type B, including jointing with seal ring conforming to IS : 5382, leaving 10 mm gap for thermal expansion, (i) Single socketed pipes. 110	meter	40.00		
	mm diameter Providing and fixing uPVC SWR floor trap			1655.861	66234.44
33	conforming to IS:13592-92 Type B, including	each	8.00	525.977	4207.82

ieaving 10 mm gap for thermal expansion, 110 mm     Image: Space of thermal expansion, 110 mm     Image: Space of thermal expansion, 110 mm       34     porting with seal ring conforming to 15: 5382, leaving 10 mm gap for thermal expansion, 110 mm     each     10.00       35     porting with seal ring conforming to 15: 5382, leaving 10 mm gap for thermal expansion, 110 mm     401.137     4011.37       36     conforming to 15: 5382, 22 Type 8, including jointing with seal ring conforming to 15: 5382, leaving 10 mm gap for thermal expansion, 110 mm     each     5.00       36     basin of approved make of size 505*435*175mm including making required opening in counter and thin site with archail at complete a sper instruction of engineer-in-charge.     each     6.00       37     with bass unions and G.1 clamps complete. including painting of fittings and bracket, cutting and making good the walls and floors wherever required:     10317.36     30952.09       38     mixer of approved make and nominal bore 15 mm with 450mm long braided hoses all complete fitting and traise where spreaders     6.00     4461.104     26766.62       39     Supply and installation of Toller ubidies made up of compact Lamina as per following participation of male for the spreader spreaders     6.00     4461.104     26766.62       30     Supply and installation complete fitting approved brack of compact Laminate: 12mm Size of Cubicle made up of compact Laminate: 12mm Size of Cubicle made up of the spreader s			1	I	1	
dia     Image: conforming to 15:13529: 92 Type B, including glotting with seal ring conforming to 15:1352, leaving 10 mm gap for thermal expansion, 110 mm dia     each     10.00     401.137       34     Foroiding and fixing uPVC SWR Plain tee conforming to 15:13529:29 Type B, including jointing with seal ring conforming to 15:1382, leaving 10 mm gap for thermal expansion, 110 mm dia     each     5.00     401.137       35     Jointing with seal ring conforming to 15:1382, leaving 10 mm gap for thermal expansion, 110 mm dia     each     5.00     5.00       36     Including mating required opening in counter as per instruction of engineer-in-charge.     5385.82     32314.92       37     With brass unions and 6 1 chargo complete. including partiting of fittings and brackets, cutting and making good the walls and floors wherever required :     each     6.00     6.00       38     With Sear of Clarge CP brass single lever basin mixer of approved make and nominal bore 15 mm with ASOmm long braided hoses all complete fitting as per instruction of engineer in charge.     each     6.00       39     Of compact board of Decorative Lamina as per of compact board of Decorative Laminate: 12mm Size of Cubick = 900mm (W) X1300mm (D) X 2100mm/Accessories standard - Standers) per direction. Thickness of Compact Laminate: 12mm Size of Cubick = 900mm (W) X1300mm (D) X 2100mm/Accessories standard - Standers) per Soarde Accessories     each     8.00       39     306 Krade Accessories     1047.35.67     5894.27       39     305 Crat Hook N) SS Spring Loaded Butt Higgs with cover i) SS Adjus		jointing with seal ring conforming to IS : 5382,				
Providing and fixing UVC SWR Plain bend conforming to IS:13592-92 Type 8, including jointing with seal ring conforming to IS: 5382, leaving 10 mm gap for thermal expansion, 110 mm dia       each       10.00         Providing and fixing UVC SWR Plain tee conforming to IS:13592-92 Type 8, including jointing with seal ring conforming to IS: 5382, leaving 10 mm gap for thermal expansion, 110 mm dia       401.137       4011.37         Providing and fixing UVC SWR Plain tee conforming to IS: 15382-92 Type 8, including jointing with seal ring conforming to IS: 5382, leaving 10 mm gap for thermal expansion, 110 mm dia       each       5.00         36       Including making of caramic counter top was basin of approved make of size 505*435*175mm including and fixing withe vitreous china flat back urinal basin of 355x340x535mm size with urinal valve auto closing system and C.P. brass spreaders each discomments and SL clamps complete. Including painting of fittings and thorackets, cutting and making good the walls and floors wherever required :       10317.36       30952.09         Providing and fixing und DE D brass single lever basin miker of approved make and nominal bore 15 mm with Aform long trained of rolet excludes made up of compact board of Decorative Lamina as per following specification of Toilet cubicles made up of compact board of Decorative Lamina as per following specification of Toilet cubicles made up of compact board of Decorative Lamina as per following specification omplete finting and 150 mm (Accare as per approve EI Ca sup er direction. Thickness of Compact Laminate: 120mm Size - 1945mn (H) & Corall Height of Cubicle - 2100m (H), Door Size - 1925mn (H) x 600mm (H), Divider Size - 1945mn (H) & Corall Height of Cubicle - 2100m (Hourd Botthe Gap ef ei) S5 Door Knob h) S5 Spring Loaded Butt Hi						
34       joriting with sail arg conforming to 15: 1382, leaving 10 mm gap for thermal expansion, 110 mm dia       401.137       401.137         35       providing and fixing orforming to 15: 1382, leaving 10 mm gap for thermal expansion, 110 mm dia       401.137       4011.37         36       providing and fixing orforming to 15: 1382, leaving 10 mm gap for thermal expansion, 110 mm dia       each       5.00       486.495       2432.48         36       basin of approved make of size 505*435*175mm including making required opening in counter and fixing write vitreous china flat back urrinal basin of 3535.403535mm size writh urrinal vasue uso closing system and C.P. brass spreaders with urrinal basin of 3535.403535mm size writh urrinal vasue uso alocing system and C.P. brass spreaders with urrinal vasue uso closing system and C.P. brass spreaders with urrinal vasue uso closing system and C.P. brass spreaders with urrinal vasue uso closing system and C.P. brass spreaders with urrinal vasue uso closing system and C.P. brass spreaders with urrinal vasue uso closing system and C.P. brass spreaders with urrinal vasue uso closing system and C.P. brass spreaders with urrinal vasue uso closing system and C.P. brass spreaders with urrinal vasue and nominal bra to the system and C.P. brass spreaders with urrinal vasue and nominal bras to the system and C.P. brass spreaders with urrinal vasue and spreader the system and C.P. brass spreaders with urrinal vasue and the system and C.P. brass spreaders with urrinal vasue and spreader the spread vasue of approved the walls and floors there ver the spread vasue of approved the vasue and nominal bra to the spread vasue of approved the vasue and spreaders with urrinal vasue and spreaders with urrinal vasper following spreading and transpread vasper (11000 mm dia) and m						
34       jointing with seal ring conforming to 15: 5382, leaving 10 mm gap for thermal expansion, 110 mm dia       401.137       4011.37         35       conforming to 15: 15382-92 Type B, including jointing with seal ring conforming to 15: 5382, leaving 10 mm gap for thermal expansion, 110 mm dia       each       5.00       401.137         36       Forwiding and fixing of ceramic counter top was basin of approved make of size 505*435*175mm including and fixing required opening in counter and finishing side by filling material al complete as per instruction of engineer-in-charge.       6.00       5385.82       32314.92         37       With brass unions and G.I clamps complete. including and fixing of CP brass single lever basin mixer of approved make and brackst, cutting and making goot the walls and floors wherever required :       6.00       4461.104       26766.62         38       with brass unions and G.I clamps complete. including ad fixing of CP brass single lever basin mixer of approved make and nominal bore 15 mm with 450mm tog pravide hoses all complete fixing as per instruction of engineer in charge.       6.00       4461.104       26766.62         30       Supply and installation of Toliet cubicles made up of compat board of Decorative Laminate: 12mm Size of Cubicle - 900mm (W) X 1300mm (I) X 2100mm (H), Door Size - 1925mm (H), Voerul Height of 150mm, Accessories and card - Stainless steel - 150m, Accessories and card - Stainless steel - 19 SS Coat Hook 11, SS Fire Channel (I) SS Top Rall e) SS Coar Hook 11, SS Fire Channel (I) SS Top Rall e) SS Coar Hook 11, SS Spring Loaded Butt Hinges with cover 11, SS Adjustable Foot - 316 grade 11, Bubber Hing with hoor stoppe						
leaving 10 mm gap for thermal expansion, 110 mm dia     401.137     4011.37       31     Providing and fixing uPVC SWR Plain tee conforming to IS.13592-92 Type B, including jointing with seal ring conforming to IS.382, leaving 10 mm gap for thermal expansion, 110 mm dia     each     5.00       32     Providing and fixing of ceramic counter top was basin of approved make of size 505*433*175mm including making required opening in counter and finishing side by fillig material al complete as per instruction of engineer-in-charge.     6.00     5385.82     32314.92       33     With Drass unions and C1 clamps complete. including painting of fittings and brackets, cutting and making good the walls and floors wherever required :     10317.36     30952.09       34     mixer of approved make and nominal bore 15 mm with 450mm long braided hoses all complete fitting as per instruction of engineer in-charge.     each     6.00     4461.104     26766.62       5     Supply and installation of Toller cubicles made up of compact board of Decorative Lamina as per following specification complete in all respect of approved braid (Make - Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Thickness of Gompact Laminate: 120mm Size of Cubicles - 200mm (Wit X100mm (D) X100mm (H), Door Size - 1925mm (H). 600mm (W), Divider Size - 1945mm (H). 600mm (W), Divider Size - 1945mm (H). 600mm (W), Sixer Channel     8.00       30     Sixer Channel (D) SS T* Channel (Only corner unit) c) SS Door stopper (D) SS T* Channel (D) SS St						
dia     401.137     401.137       Providing and fixing uPVC SWR Plain tee conforming to IS:13592-92 Type B, including jointing with seal ring conforming to IS:1382, leaving 10 mm gap for thermal expansion, 110 mm     each     5.00       Broviding and fixing of ceramic counter top was basin of approved make of size 505*435*175mm including making required opening in counter and finishing side by fillig material al complete as per instruction of engineer-in-charge.     6.00     5385.82     32314.92       Providing and fixing of CP brass single lever basin mker of approved make and brackets, cutting and making good the walls and filoors wherever required :     10317.36     30952.09       Providing ad hixing of CP brass single lever basin mker of approved make and nominal bore 15 mm with Aform long trained not rollet cubicles made up of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make – Century Cubicles, Green, Merino) and manufacture as per approve EI cas per direction. Thickness of Compact Laminate: 12mm Size of Cubicle – 900mm (W) X 1300mm (W), Divider Size – 1945mm (H), Overall Height of Cubicle – 2100mm (Including Bottom Gap of 150mm (Accessories a) SS 'U' Channel () SS Cost Hook 1) SS Firk Channel (Coling correr unit) c) SS Door Stopper Channel d) SS Door Stopper Channel d) SS Door Stopper Channel d) Stopper Main State of Case relatings with cover 1) SA Adjustable Foot – 316 grade 1) Bubber lining with bors topper k) SS Screws 304 grade     4000       40     Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.     4.000       41     Approved make as per instruction of engineer-in- charge.     4.00	34	jointing with seal ring conforming to IS : 5382,	each	10.00		
Providing and fixing uPVC SWR Plain tee conforming to IS:13592.92 Type 8, including jointing with seal ring conforming to IS: 5382, leaving 10 mm gap for thermal expansion, 110 mm dia       5.00         36       Providing and fixing of ceramic counter top was basis of approved make of size 5057 438' 175mm including making required opening in counter and finishing side by fillig material al complete as per instruction of engineer-in-charge.       6.00         37       With Sead MXXX353mm size with urinal valve auto closing system and C.P. brass spreaders with brass unloss and G.I clamps complete. including painting of fittings and brackets, cutting and making good the walls and floors wherever required :       3.00         38       Providing and fixing of CP brass single lever basin with 450mm long braided hoses all complete fitting as per instruction of engineer in charge.       4461.104       26766.62         Supply and installation of Toliet Cubicles made up of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make – Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle – 900mm (W) X 1300mm (D) X 2100mm(H), Doorsize – 915mm (H) K 00mm (W), Divider Size – 1945mm (H), Overall Height of Cubicle – 2100mm (Including Botting of 150mm).Accessories standard – Stainless steel – 304 Grade Accessories a) SS Tur Channel b) SS Tir Channel b) SS Tir Channel b) SS Tor Rail e) SS Coor Khoob f) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade i) Rubber lining with boor stopper k) SS S Screws 304 grade       47200.00       377500.00         410       approved make as per instruction of engineer-in- charge.<		leaving 10 mm gap for thermal expansion, 110 mm				
35       conforming to IS:13592-92 Type B, including jointing with seal ring conforming to IS: S382, leaving 10 mm gap for thermal expansion, 110 mm da       5.00       486.495       2432.48         36       Providing and fixing of ceramic counter top was basin of approved make of size 505*435*175mm including making required opening in counter and finishing side by fillig material al complete as per instruction of engineer-in-charge.       5.00       486.495       2432.48         37       Providing and fixing white vitreous china flat back urinal basin of 355x340x353mm size with urinal valve auto closing system and C.P. brass spreaders with brass unions and G.I clamps complete. including painting of fittings and hackets, cutting and making good the walls and floors wherever required :       3.00       10317.36       30952.09         38       With 450mm long braided hoses all complete fitting as per instruction of engineer in charge.       each       6.00       4461.104       26766.62         9       Froviding ad fixing of CP brass single lever basin mixer of approved make and nominal bore 15 mm with 450mm long braided hoses all complete fitting as per instruction of engineer in charge.       each       6.00       4461.104       26766.62         9       of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make - Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Titickness of compact Laminate: 12mm Size of Cubicle - 900mm (W) X 1300mm (D) X 2100mm (H), Doors Size - 9125mm (H) & Oorsit - 9125mm (H) & Oorsitapel 91       8.00       377600.00 </td <td></td> <td>dia</td> <td></td> <td></td> <td>401.137</td> <td>4011.37</td>		dia			401.137	4011.37
35       jointing with seal ring conforming to IS : 5382, leaving 10 mm gap for thermal expansion, 110 mm dia       6ach       5.00       486.495       2432.48         9       Providing and fixing of ceramic counter top was basis of approved make of size 505435*175mm including making required opening in counter and finishing side by filling material al complete as per instruction of engineer-in-charge.       6.00       6.00       3385.82       32314.92         9       Providing and fixing white vitreous china flat back urinal basin of 3553x40c335mm size with urinal valve auto closing system and C.P. brass spreaders including painting of fittings and brackets, cutting and making good the walls and floors wherever required :       3.00       10317.36       30952.09         38       Providing ad fixing of CP brass single lever basin with 450mm long braided hoses all complete fitting as per instruction of engineer in charge.       6.00       6.00       6.00       26766.62         Supply and installation of Tollet cubicles made up of compact board of Decorative Lamina as per following specificature as per approve EIC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle - 900mm (W) X 1300mm (D) X 1200mm(H), Door Size - 1925mm (H) X 600mm (W), Divider Size - 1945mm (H), Overall Height of Cubicle - 2100mm (H). Door Size - 1925mm (H) X 600mm (H), SS for Roal a) SS 7''' Channel b) SS 7''		Providing and fixing uPVC SWR Plain tee				
35       jointing with seal ring conforming to IS : 5382, leaving 10 mm gap for thermal expansion, 110 mm dia       6ach       5.00       486.495       2432.48         9       Providing and fixing of ceramic counter top was basis of approved make of size 505435*175mm including making required opening in counter and finishing side by filling material al complete as per instruction of engineer-in-charge.       6.00       6.00       3385.82       32314.92         9       Providing and fixing white vitreous china flat back urinal basin of 3553x40c335mm size with urinal valve auto closing system and C.P. brass spreaders including painting of fittings and brackets, cutting and making good the walls and floors wherever required :       3.00       10317.36       30952.09         38       Providing ad fixing of CP brass single lever basin with 450mm long braided hoses all complete fitting as per instruction of engineer in charge.       6.00       6.00       6.00       26766.62         Supply and installation of Tollet cubicles made up of compact board of Decorative Lamina as per following specificature as per approve EIC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle - 900mm (W) X 1300mm (D) X 1200mm(H), Door Size - 1925mm (H) X 600mm (W), Divider Size - 1945mm (H), Overall Height of Cubicle - 2100mm (H). Door Size - 1925mm (H) X 600mm (H), SS for Roal a) SS 7''' Channel b) SS 7''		conforming to IS:13592-92 Type B, including				
leaving 10 mm gap for thermal expansion, 110 mm dia     486.495     2432.48       Providing and fixing of ceramic counter top was basin of approved make of size 505*435*175mm including making required opening in counter and finishing side by fillig material al complete as per instruction of engineer-in-charge.     6.00     5385.82     32314.92       Providing and fixing white vitreous china flat back urinal basin of 355x340x535mm size with urinal valve auto closing system and C.P. brass spreaders including painting of fittings and brackets, cutting and making good the walls and floors wherever     each     6.00     3.00       37     with brass unions and G.I clamps complete. including painting of fittings and brackets, cutting and making good the walls and floors wherever     each     6.00     4461.104     26766.62       38     Providing ad fixing of CP brass single lever basin mixer of approved make and nominal bore 15 mm with 450mm long braided hoses all complete fitting as per instruction of engineer in charge.     each     6.00     4461.104     26766.62       Supply and installation of Tollet cubicles mde up of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make – Century Cubicles, Green, per direction, Thickness of Compact Laminate: 12mm Size of Cubicle – 900mm (W) X 1300mm (D) X 2100mm (hcuding Bottom Gap of 150mm), Accessories standard – Stainless steel – 304 Grade Accessories a) S5 T'' Channel b) S5 T''' Channel b) S5 T''' Channel b) S5 Sprivacy Thumb turn c/w Occupancy indicator a) S5 Dor Knob     a) Totall 4.00     37760.00       40     Providig and fixing of CP coated wall mixture of approved make as per ins	35	jointing with seal ring conforming to IS : 5382,	each	5.00		
dia     486.495     2432.48       Providing and fixing of ceramic counter top was basin of approved make of size 505*435*175mm including making required opening in counter and finishing side by filly material al complete as per instruction of engineer-in-charge.     6.00     5385.82     32314.92       Providing and fixing white vitreous china flat back urnal basin of 355x2040535mm size with urinal valve auto closing system and C.P. brass spreaders including painting of fittings and brackets, cutting and making good the walls and floors wherever required :     3.00     10317.36     30952.09       38     Providing and fixing of CP brass single lever basin mixer of approved make and nominal bore 15 mm with 450mm long braided hoses all complete fitting as per instruction of engineer in charge.     6.00     4461.104     26766.62       Supply and installation of Toliet cubicles made up of compact board of Decorative Lamina as per following specification or Complete in all respect of approved brand (Make - Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Thickness of compact Laminate: 12mm Size of Cubicle - 900mm (W) X 1300mm (D) X 2100mm (H), Door Size - 1925mm (H), Overall Height of Cubicle - 2100mm (Including Bottom Gap of 150mm), Accessories standard - Stainless stel - 395 STP Channel b) SS TP Channel b) SS TP Channel (Only corner unit) c) SS Door Stopper Channel d) SS Top Rail e) SS Door Mob     8.00     4.00       Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.     4.00     377600.00       Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.     4.00     377600.0						
36     basin of approved make of size 505*435*1175mm including making required opening in counter and finishing side by filig material al complete as per instruction of engineer-in-charge.     each     6.00     5385.82     32314.92       37     with brass unions and G.1 clamps complete. including painting of fittings and brackets, cutting and making good the walls and floors wherever required :     each     3.00     3.00     30952.09       38     mixing of QD brass single lever basin with 450mm long braided hoses all complete fitting as per instruction of regineer in charge.     each     6.00     4461.104     26766.62       Supply and installation of Toiler cubicles made up of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make – Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle – 900mm (W) X 1300mm (D) X 2100mm(H). Door Size – 1925mm (H) x 600mm (W), Divider Size – 1945mm (H), Overall Height of Cubicle – 2100mm (Including Bottom Gap of 150mm),Accesories standard – Stainless steel – 304 Grade Accessories a) SS "U" Channel b) SS "U" Channel b) SS "U" Channel b) SS "Firacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable foot – 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 grade k) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SD Door Knob h) SS S					486.495	2432.48
36     basin of approved make of size 505*435*1175mm including making required opening in counter and finishing side by filig material al complete as per instruction of engineer-in-charge.     each     6.00     5385.82     32314.92       37     with brass unions and G.1 clamps complete. including painting of fittings and brackets, cutting and making good the walls and floors wherever required :     each     3.00     3.00     30952.09       38     mixing of QD brass single lever basin with 450mm long braided hoses all complete fitting as per instruction of regineer in charge.     each     6.00     4461.104     26766.62       Supply and installation of Toiler cubicles made up of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make – Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle – 900mm (W) X 1300mm (D) X 2100mm(H). Door Size – 1925mm (H) x 600mm (W), Divider Size – 1945mm (H), Overall Height of Cubicle – 2100mm (Including Bottom Gap of 150mm),Accesories standard – Stainless steel – 304 Grade Accessories a) SS "U" Channel b) SS "U" Channel b) SS "U" Channel b) SS "Firacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable foot – 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 grade k) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SD Door Knob h) SS S		Providing and fixing of ceramic counter top was				
36       including making required opening in counter and finishing side by fillig material al complete as per instruction of engineer-in-charge.       each       6.00       5385.82       32314.92         37       Providing and fixing white vitreous china flat back urinal basin of 355.340.535mm size with urinal valve auto closing system and C.P. brass spreaders with brass unions and G.I clamps complete. including painting of fittings and brackets, cutting and making good the walls and floors wherever required :       10317.36       30952.09         38       Providing and fixing of CP brass single lever basin mixer of approved make and nominal bore 15 mm with 450mm long braided hoses all complete fitting as per instruction of engineer in charge.       each       6.00       4461.104       26766.62         Supply and installation of Toilet cubicles made up of clompact board of Decorative Lamina as per following specification complete in all respect of approved brace of Decorative Lamina as per per direction. Thickness of Compact Lamina (N X 1300mm (D) X 2100mm(H), Door Size – 1925mm (H) X 000m (D) X 2100mm(H), Door Size – 1925mm (H) X 000mm (D) X 2100mm(H), Door Size – 1925mm (H) X 000mm (D) X 2100mm(H), Door Size – 1925mm (H) X 000mm (D) X 2100mm(H), Door Size – 1925mm (H) X 000mm (D) X 2100mm(H), Door Stopper Channel       8.00       8.00         39       305 S "U" Channel (Only corner unit) c) SS Tor Rail       9.5 S "I' Channel (Only corner unit) c) SS Door Stopper Channel       9.5 S privacy Thumb turn c/w Occupancy indicator g) SS Door Stopper Channel       9.00       9.77600.00         40       Providig and fixing of CP coated shower hose of approved make as per i						
finishing side by fillig material al complete as per instruction of engineer-in-charge.     5385.82     32314.92       Providing and fixing white vitreous china flat back urinal basin of 355X40x535mm size with urinal valve auto closing system and C.P. brass spreaders including painting of fittings and brackets, cutting and making good the walls and floors wherever required :     each     3.00     3.00       38     mixer of approved make and nominal bore 15 mm with 450mm long braided hoses all complete fitting as per instruction of engineer in charge.     each     6.00     4461.104     26766.62       Supply and installation of Toilet cubicles made up of compact board of Decorative Laminate: 12mm Size of Cubicle – 900mm (W) X 1300mm (D) X 2100mm (H). Doverall Height of Cubicle – 2100mm (H). Overall Height of S Sor Yirkayr Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Srift Channel b) SS "F" Channel (Only corner unit) c) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Sprivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS	36		each	6.00		
instruction of engineer-in-charge.       5385.82       32314.92         Providing and fixing white vitreous china flat back       urinal basin of 355.400:33mm size with urinal       a         valve auto closing system and C.P. brass spreaders       a       300       a         37       with brass unions and G.I clamps complete.       a       a       a         including painting of fittings and brackets, cutting       and making good the walls and floors wherever       required :       10317.36       30952.09         38       with 450mm long braided hoses all complete fitting       as per instruction of engineer in charge.       each       600       4461.104       26766.62         Supply and installation of Toilet cubicles made up       of compact board of Decorative Lamina as per       following specification complete in all respect of approved brand (Make – Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Thickness of Compact Loardinate:       a						
Providing and fixing white vitreous china flat back urinal basin of 355x340x353mm size with urinal valve auto closing system and C.P brass spreaders including painting of fittings and brackets, cutting and making good the walls and floors wherever required :       ach       3.00         37       with brass unions and G.I clamps complete. including painting of fittings and brackets, cutting and making good the walls and floors wherever required :       10317.36       30952.09         38       mixer of approved make and nominal bore 15 mm with 450mm long braided hoses all complete fitting as per instruction of engineer in charge.       each       6.00       4461.104       26766.62         Supply and installation of Toliet cubicles made up of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make – Century Cubicle, Green, Merino) and manufacture as per approve IC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle – 900mm (W) X 1300mm (D) X 2100mm (Including Bottom Gap of 150mm),Accessories standard – Stainless steel – 30 GOA Grade Accessories a) SS "U" Channel b) SS "F" Channel (Only corner unit) c) SS Door Stopper Channel d) SS Top Rail e) SS Coat Hook f) SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS STyring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 grade       4.00       377600.00         40       Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.       4.00       1473.567       5894.27         41       Supply, installation, balancing and commissioning d2       Supply, i					5385.82	32314.92
37urinal basin of 355/x340x535mm size with urinal valve auto closing system and C.P. brass spreaders with brass unions and G.I clamps complete. including painting of fittings and brackets, cutting and making good the walls and floors wherever required :each3.0038Providing ad fixing of CP brass single lever basin mixer of approved make and nominal bore 15 mm with 450mm long braided hoses all complete fitting as per instruction of engineer in charge.each6.004461.10426766.6239Of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make – Century Cubicles, Green, Merino) and manufacture as per approve IC as per direction. Thickness of Compact Laminate: 120mm (INU, Dotralite – 900mm (W) X 1300mm (D) X 2100mm (H). Door Size – 1925mm (H) x 600mm (W), Divider Size – 1945mm (H). Overall Height of Cubicle – 2100mm (Including Bottom Gap of 150mm).Accessories standard – Stainless steel – 305 ST Or Knob h) SS ST Contanel (Di SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knobe h) SS St Sort Knob H) SS St Sort Knob H) SS Strivacy Thumb turn c/w Occupancy indicator g) SS Door Knobe h) SS St Sort Knob H) SS Stort Knob H) SS Adjustable Foot – 316 grade (Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.each4.0041Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.each4.0042of fibricated at site GSS sheet (sheet thickness of approved make as per instruction of engineer-in- charge.a.00377600.0042of fibricated at site GSS sheet (sheet thickness of approved m						
377valve auto closing system and C.P. brass spreaders with brass unions and G. I clamps complete. including painting of fittings and brackets, cutting and making good the walls and floors wherever required :each3.0038Providing ad fixing of CP brass single lever basin mixer of approved make and nominal bore 15 mm with 450mm long braided hoses all complete fitting as per instruction of engineer in charge.each6.004461.10426766.6238Supply and installation of Toilet cubicles made up of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make - Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle - 900mm (W) X 1300mm (D) X 2100mm (H). Door Size - 1925mm (H) × 600mm (W), Divider Size - 1945mm (H). Overall Height of Cubicle - 2100mm (Including Bottom Gap of 150mm).Accessories standard - Stainless steel - 304 Grade Accessories a) SS T"C Channel (D) SS Sort Stopper Channel d) SS Top Rali (S S Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot - 316 grade j) Rubber lining with Door stopper k).S.S Screws 304 gradeeach8.0040Providing and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.each4.0041Providing and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.each4.0042of fabricated at site GSS sheet (sheet thickness of approved make as per instruction of engineer-in- charge.sample cubicles for sample						
37       with brass unions and G.I clamps complete.       each       3.00       3.00         38       making good the walls and brockets, cutting and making good the walls and floors wherever required :       10317.36       30952.09         38       Providing ad fixing of CP brass single lever basin with 450mm long braided hoses all complete fitting as per instruction of engineer in charge.       each       6.00       4461.104       26766.62         9       of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make – Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Thickness of Compact Laminate:       4461.104       26766.62         30       Grade Accessories       approved brand (Make – Century Cubicles, Sfreen, Merino) and manufacture as per approve EIC as per direction. Thickness of Compact Laminate:       approved brand (Make – Century Cubicles, Sfreen, M(X) 1300m (D)       X 2100mm(H), Door Size – 1925mm (H) × 600mm (W) × 1300m (D)       approved brand (Diver Size – 1925mm (H), Overall Height of Cubicle – 920mm (Including Bottom Gap of 150mm), Accessories standard – Stainless steel – 304 Grade Accessories       each       8.00       approved brand (Diver or unit) c) SS Door Stopper Channel       approved brand (Diver or unit) c) SS Door Stopper Channel       approved make as per instruction of engineer-in-charge.       47200.00       377600.00         40       approved make as per instruction of engineer-in-charge.       each       4.00       approved make 35200.60			each			
including painting of fittings and brackets, cutting and making good the walls and floors wherever required :       10317.36       30952.09         38       Providing ad fixing of CP brass single lever basin mixer of approved make and nominal bore 15 mm as per instruction of engineer in charge.       each       6.00       4461.104       26766.62         Supply and installation of Toilet cubicles made up of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make - Century Cubicles, Green, Merrino) and manufacture as per approve EIC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle - 900mm (W) X 1300mm (D) X 2100mm(H), Door Size - 1925mm (H) × 600mm (W), Divider Size - 1925mm (H), Worall Height of Cubicle - 2100mm (Including Bottom Gap of 150mm).Accessories standard - Stainless steel - 39       each       8.00       8.00         304 Grade Accessories a) SS "U" Channel (Dis S "Fir Channel (Only corner unit) c) SS Door Stopper Channel d) SS Top Rail e) SS Coat Hook f) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot - 316 grade i) Rubber lining with Door stopper k) S.S Screws 304 grade       47200.00       377600.00         40       Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.       each       4.00       47200.00         41       Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.       sagm 10.00       5000.50	37			3 00		
and making good the walls and floors wherever required :10317.3630952.0938Providing af fixing of CP brass single lever basin mixer of approved make and nominal bore 15 mm with 450mm long braided hoses all complete fitting as per instruction of engineer in charge.each6.0030952.0938Supply and installation of Toilet cubicles made up of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make – Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle – 900mm (W) X 1300mm (D) X 2100mm(H), Door Size – 1925mm (H) x 600mm (W), Divider Size – 1925mm (H) x 600mm (Cubicle – 2100mm (including Bottom Gap of 150mm), Accessories standard – Stainless steel – 304 Grade Accessories a) 55 "U" Channel (b) S5 "Fric Channel (only corner unit) c) S5 Door Stopper Channel d) S5 Top Rail e) S5 Coor Stopper Channel d) S5 Strip Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) S.S Strews 304 grade47200.00377600.0040Providing and fixing of CP coated wall mixture of charge.4.004003800.1535200.6041approved make as per instruction of engineer-in- charge.each4.008800.1535200.6042Of fabricated at site GSS sheet (sheet thickness of sqm10.001473.5675894.27	57			5.00		
required :10317.3630952.0938Providing ad fixing of CP brass single lever basin miker of approved make and nominal bore 15 mm with 450mm long braided hoses all complete fitting as per instruction of engineer in charge.each6.004461.10426766.62Supply and installation of Toilet cubicles made up of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make - Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle - 900mm (W) X 1300mm (D) X 2100mm (H), Door Size - 1925mm (H) x 600mm (W), Divider Size - 1945mm (H), Verall Height of Cubicle - 2100mm (Including Bottom Gap of 150mm),Accessories standard – Stainless steel - 304 Grade Accessories a) SS "f" Channel b) SS "f"C Channel (D) SS Door Stopper Channel (d) SS Top Rail e SS Coat Hook f) SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knob h ) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot - 316 grade j) Rubber lining with Door stopper k) S.S Srews 304 gradeeach4.0047200.00377600.0040Approved make as per instruction of engineer-in- charge.Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.4.008800.1535200.6041Approved make as per instruction of engineer-in- charge.Acce Kew KekEach4.0042Of fabricated at site GSS Sheet (sheet thickness of sqmsqm10.00377600.00						
38     Providing ad fixing of CP brass single lever basin mixer of approved make and nominal bore 15 mm with 450mm long braided hoses all complete fitting as per instruction of engineer in charge.     each     6.00       38     Supply and installation of Toilet cubicles made up of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make – Century Cubicles, Green, Merino) and manufacture as per approve EL as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle – 900mm (W) X 1300mm (D) X 2100mm(H). Door Size – 1925mm (H) X 600mm (W), Divider Size – 1925mm (H), Overall Height of Cubicle – 2100mm (Including Bottom Gap of 150mm).Accessories standard – Stainless steel – 30 St GW * Channel b) SS * T° Channel (Only corner unit) c) SS Door Stopper Channel d) SS Top Rail e) SS Coor Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) S.S.Szrews 304 grade     8.00       40     Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.     4.00       41     approved make as per instruction of engineer-in- charge.     4.00       41     Supproved make as per instruction of engineer-in- charge.     8800.15       42     of fabricated at site GSS sheet (sheet thickness of following sheet thickness of approved make as per instruction of engineer-in- charge.     4.00					10317 36	30952 09
38mixer of approved make and nominal bore 15 mm with 450mm long braided hoses all complete fitting as per instruction of engineer in charge.each6.004461.10426766.623upply and installation of Toilet cubicles made up of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make – Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle – 900mm (W) X 1300mm (D) X 2100mm(H), Door Size – 1925mm (H) x 600mm (W), Divider Size – 1945mm (H), Overall Height of Cubicle – 2100mm (Including Bottom Gap of 150mm),Accessories standard – Stainless steel – a) 304 Grade Accessories a) SS "1" Channel (D) SS "1" Channel (D) SS Toro Stopper Channel d) SS Toro Stopper Channel d) SS Toro Stopper Channel d) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade joroved make as per instruction of engineer-in- charge.each4.0047200.00377600.00410Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.each4.00473.5675894.27411Approved make as per instruction of engineer-in- charge.each4.008800.1535200.60 <t< td=""><td></td><td></td><td></td><td></td><td>1001/100</td><td>00002.00</td></t<>					1001/100	00002.00
38with 450mm long braided hoses all complete fitting as per instruction of engineer in charge.each6.00Supply and installation of Toilet cubicles made up of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make – Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle – 900mm (W) X 1300mm (D) X 2100mm(H), Door Size – 1925mm (H) x 600mm (W), Divider Size – 1945mm (H), Overall Height of Cubicle – 2100mm (Including Bottom Gap of 150mm), Accessories standard – Stainless steel – 304 Grade Accessories a JSS "U" Channel b) SS "F" Channel (Only corner unit) c) SS Door Stopper Channel d) SS Top Rail e) SS Coat Hook f) SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) SS. Screws 304 gradeeach 4.004.0041Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.each4.0042Orividg and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.each4.0042Orividg and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.each4.0042Orividg and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.4.008800.1542Orividg and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.9.0035200.60						
as per instruction of engineer in charge.4461.10426766.62Supply and installation of Toilet cubicles made up of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make – Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle – 900mm (W) X 1300mm (D) X 2100mm(H), Door Size – 1925mm (H) x 600mm (W), Divider Size – 1925mm (H) x 600mm (W), Divider Size – 1925mm (H) x 600mm (B) SS "1" Channel b) SS "1" Channel b) SS "1" Channel cubicle – 2100mm (Including Bottom Gap of 150mm), Accessories standard – Stainless steel – 304 Grade Accessories a) SS "1" Channel b) SS "F" Channel (Only corner unit) c) SS Dop Rail e) SS Coat Hook f) SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) SS S Screws 304 grade47200.00377600.0040Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.4.001473.5675894.2741Approved make as per instruction of engineer-in- charge.each4.008800.1535200.6042Of Abricatel at site GSS sheet (sheet thickness of supply, installation, balancing and commissioning d fabricated at site GSS sheet (sheet thickness of supply).4.001473.5675894.27	38		each	6.00		
Supply and installation of Toilet cubicles made up of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make – Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle – 900mm (W) X 1300mm (D) X 2100mm(H), Door Size – 1925mm (H) x 600mm (W), Divider Size – 1945mm (H), Overall Height of Cubicle – 2100mm (Including Bottom Gap of 150mm),Accessories standard – Stainless steel – 304 Grade Accessories8.0039304 Grade Accessories of Si S <sup>m</sup> Channel (Only corner unit) c) SS Door Stopper Channel d) SS Top Rail e) SS Coat Hook h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 grade47200.00377600.0040Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.4.004.008800.1541Supply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of s sqm10.005.003.02					4461 104	26766 62
of compact board of Decorative Lamina as per following specification complete in all respect of approved brand (Make – Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle – 900mm (W) X 1300mm (D) X 2100mm(H), Door Size – 1925mm (H) X 000mm (D) X 2100mm (H), Divider Size – 1932mm (H) Verall Height of Cubicle – 2100mm (Including Bottom Gap of 150mm),Accessories standard – Stainless steel – 30 AG Grade Accessories a) SS "U" Channel (D) SS "U" Channel (Only corner unit) c) SS Door Stopper Channel d) SS Top Rail e) SS Coat Hook f) SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 gradeeach8.0047200.0040Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.each4.0047200.0041Ac&R WORKinstallation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of sofsqm10.00					11011101	20700.02
following specification complete in all respect of approved brand (Make - Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle - 900mm (W) X 1300mm (D) X 2100mm(H), Door Size - 1925mm (H) × 600mm (W), Divider Size - 1945mm (H), Overall Height of 150mm),Accessories standard - Stainless steel - 150mm),Accessories standard - Stainless steel - a) SS "U" Channel b) SS "F" Channel (Only corner unit) c) SS Door Stopper Channel d) SS Top Rail e) SS Coat Hook f) SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot - 316 grade k) S.S Screws 304 gradeeach8.0047200.00400Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.each4.0047200.00411Stop Que difting of CP coated wall mixture of charge.each4.008800.1535200.6042Supply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of sqmsqm10.0010.00						
approved brand (Make - Century Cubicles, Green, Merino) and manufacture as per approve EIC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle - 900mm (W) X 1300mm (D) X 2100mm(H), Door Size - 1925mm (H) x 600mm (W), Divider Size - 1945mm (H), Overall Height of Cubicle - 2100mm (Including Bottom Gap of 150mm),Accessories standard - Stainless steel - 304 Grade Accessorieseach8.0039304 Grade Accessories of SS Tor Channel (D) SS "F" Channel (Only corner unit) c. SS Door Stopper Channel d) SS Top Rail e) SS Coat Hook f) SS Drivacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot - 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 grade47200.00377600.0040Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.each4.008800.1541Supply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of sqm10.00into unit in thickness of sqminto unit into un						
Merino) and manufacture as per approve EIC as per direction. Thickness of Compact Laminate: 12mm Size of Cubicle – 900mm (W) X 1300mm (D) X 2100mm(H), Door Size – 1925mm (H) × 600mm (W), Divider Size – 1945mm (H) × 000mm (D) X 2100mm(H), Door Size – 1925mm (H) × 000mm (Cubicle – 2100mm (Including Bottom Gap of 150mm),Accessories standard – Stainless steel – 39each8.0039304 Grade Accessories of Grade Accessories (S S Tor Channel d) SS "F" Channel (Only corner unit) (C) SS Door Stopper Channel d) SS Tor Pail (S S Tor Pail e) SS Coat Hook f) SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 gradeeach4.00377600.0040Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.each4.001473.5675894.2741Supply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of supply.sqm10.00100						
per direction. Thickness of Compact Laminate: 12mm Size of Cubicle – 900mm (W) X 1300mm (D) X 2100mm(H), Door Size – 1925mm (H) x 600mm (W), Divider Size – 1945mm (H), Overall Height of Cubicle – 2100mm (Including Bottom Gap of 150mm),Accessories standard – Stainless steel –each8.0039304 Grade Accessories a) SS "U" Channel b) SS "F" Channel (Only corner unit) c) SS Door Stopper Channel d) SS Top Rail e) SS Coat Hook f) SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 grade47200.00377600.0040Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.each4.008800.1535200.6041Ac&R WORKImage: Simple Coated wall mixture of approved make as per instruction of engineer-in- charge.4.00Image: Simple Coated wall mixture of approved make as per instruction of engineer-in- charge.4.008800.1535200.6042Supply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of some size)supply. Installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of some size)supply. Image: Size of						
12mm Size of Cubicle - 900mm (W) X 1300mm (D) X 2100mm(H), Door Size - 1925mm (H) x 600mm (W), Divider Size - 1945mm (H), Overall Height of Cubicle - 2100mm (Including Bottom Gap of 150mm), Accessories standard - Stainless steel - 304 Grade Accessorieseach8.0039304 Grade Accessories a) SS "U" Channel b) SS "F" Channel (Only corner unit) c) SS Door Stopper Channel d) SS Top Rail e) SS Coat Hook f) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot - 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 gradeeach4.0040Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.each4.0041Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.each4.0042Supply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of sqmsqm10.00						
X 2100mm(H), Door Size - 1925mm (H) x 600mm (W), Divider Size - 1945mm (H), Overall Height of Cubicle - 2100mm (Including Bottom Gap of 150mm), Accessories standard - Stainless steel - 398.008.0039304 Grade Accessories a) SS "U" Channel b) SS "F" Channel (Only corner unit) c) SS Door Stopper Channel d) SS Top Rail e) SS Coat Hook f) SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot - 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 grade47200.00377600.00400Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.each4.0041473.5675894.27411Approved make as per instruction of engineer-in- charge.each4.008800.1535200.6042Supply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness ofsqm10.00						
(W), Divider Size - 1945mm (H), Overall Height of Cubicle - 2100mm (Including Bottom Gap of 150mm), Accessories standard - Stainless steel -aaa39304 Grade Accessories a) SS "U" Channel b) SS "F" Channel (Only corner unit) c) SS Door Stopper Channel d) SS Top Rail e) SS Coat Hook f) SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot - 316 grade j) Rubber lining with Door stopper k) S.S Srews 304 gradea47200.00377600.0040Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.each4.001473.5675894.2741Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.each4.008800.1535200.6042Supply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of some some some some some some some some						
Cubicle - 2100mm (Including Bottom Gap of 150mm),Accessories standard - Stainless steel - 304 Grade Accessories a) SS "U" Channel b) SS "F" Channel (Only corner unit) c) SS Door Stopper Channel d) SS Top Rail e) SS Coat Hook f) SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot - 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 gradeeach8.00Interval a construction of engineer-in- charge.at the second state of the second						
150mm),Accessories standard – Stainless steel – 304 Grade Accessories a) SS "U" Channel b) SS "F" Channel (Only corner unit) c) SS Door Stopper Channel d) SS Top Rail e) SS Coat Hook f) SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 gradeeach8.00Interval a proved make as per instruction of engineer-in- charge.each8.00Interval a proved make as per instruction of engineer-in- charge.each8.00Interval a proved make as per instruction of engineer-in- charge.each4.00ArzenArzenArzen41Supply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of supplysqm10.00Interval sqm10.00Interval sqmInterval 		_ · · ·				
39304 Grade Accessories a) SS "U" Channel b) SS "F" Channel (Only corner unit) c) SS Door Stopper Channel d) SS Top Rail e) SS Coat Hook f) SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 grade44						
a) SS "U" Channela) SS "U" Channela) SS "U" Channelb) SS "F" Channel (Only corner unit)b) SS "F" Channel (Only corner unit)b) SS "F" Channel (Only corner unit)c) SS Door Stopper Channelb) SS Top Railb) SS Top Raile) SS Coat Hookb) SS Spriacy Thumb turn c/w Occupancy indicatorb) SS Spriacy Thumb turn c/w Occupancy indicatorg) SS Door Knobb) SS Spring Loaded Butt Hinges with coverb) SS Spring Loaded Butt Hinges with coveri) SS Adjustable Foot - 316 gradeb) SS Screws 304 gradechargej) Rubber lining with Door stoppercharge47200.00k) S.S Screws 304 gradecharge47200.0040approved make as per instruction of engineer-in- charge.each41Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.4.0041Ac&R WORKeach4.0042Supply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of sqmsqm42Supply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of of fabricated at site GSS sheet (sheet thickness ofsqm	39		each	8.00		
b) SS "F" Channel (Only corner unit)Image: SS Door Stopper ChannelImage: SS Door Stopper Channeld) SS Top RailImage: SS Coat HookImage: SS Coat HookImage: SS Coat Hookf) SS Privacy Thumb turn c/w Occupancy indicatorImage: SS Door KnobImage: SS Door Knobh) SS Spring Loaded Butt Hinges with coverImage: SS Adjustable Foot - 316 gradeImage: SS Adjustable Foot - 316 gradei) SS Adjustable Foot - 316 gradeImage: SS Coat HookImage: SS Coat Hook40Providig and fixing of CP coated shower hose ofImage: SS Coat Hook40Approved make as per instruction of engineer-in- charge.Image: SS Coat Hook41Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.Image: SS Hook41AC&R WORKImage: Supply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of Supply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of Supply)Image: Supply42Supply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of SupplyImage: Supply	55		cuen	0.00		
c) SS Door Stopper Channel d) SS Top Rail e) SS Coat Hook f) SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 grade						
d) SS Top Rail e) SS Coat Hook f) SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot - 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 grade charge.47200.00377600.0040Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.each4.0047200.00377600.0041Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.each4.001473.5675894.2741Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.each4.0035200.6042Supply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness ofsqm10.00Image:Image:						
e) SS Coat Hook f) SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot - 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 gradeImage: Content of the stop of						
f) SS Privacy Thumb turn c/w Occupancy indicator g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 gradeImage: Control of the store of th						
g) SS Door Knob h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 gradeImage: Content of the second stress of the secon		,				
h) SS Spring Loaded Butt Hinges with cover i) SS Adjustable Foot – 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 gradeImage: Control of the stop						
i) SS Adjustable Foot - 316 grade j) Rubber lining with Door stopper k) S.S Screws 304 grade						
j) Rubber lining with Door stopper k) S.S Screws 304 gradeiii40Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.each4.0047200.0041Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.each4.001473.5675894.2741Supproved make as per instruction of engineer-in- charge.each4.001473.5675894.2741Supproved make as per instruction of engineer-in- charge.each4.0035200.6042AC&R WORKImage: Commissioning of fabricated at site GSS sheet (sheet thickness ofsqm10.00Image: Commissioning sqmImage: Commissioning sqmIma		11) 55 Spring Loaded Butt hinges with cover				
k) S.S Screws 304 grade447200.00377600.0040Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.each4.0047200.0041Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.each4.004773.56741Supproved make as per instruction of engineer-in- charge.each4.004.004.0041Supproved make as per instruction of engineer-in- charge.each4.0035200.6042AC&R WORKImage: Commissioning of fabricated at site GSS sheet (sheet thickness of sofsqm10.00Image: Commissioning sqm		i) SS Adjustable Foot - 216 grade				
Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.each4.004.0041Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.each4.001473.5675894.2741Approved make as per instruction of engineer-in- charge.each4.008800.1535200.60AC&R WORKImage: Image: Ima						
40approved make as per instruction of engineer-in- charge.each4.001473.5675894.2741Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.each4.004.004.0041Approved make as per instruction of engineer-in- charge.each4.008800.1535200.60AC&R WORK42Supply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of sqmsqm10.00Image: Colspan="4">Image: Colspan="4"42Image: Colspan="4">Image: Colspan="4"42Image: Colspan="4"Image: Colspan="4"42Image: Colspan="4"Image:		j) Rubber lining with Door stopper			47200 00	377600 00
charge.1473.5675894.2741Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.each4.004.0041AC&R WORK8800.1535200.60Supply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of sqmsqm10.00		j) Rubber lining with Door stopper k) S.S Screws 304 grade			47200.00	377600.00
Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.each4.00AC&R WORK8800.1535200.60AC&R WORK9942of fabricated at site GSS sheet (sheet thickness of sofsqm10.00	40	<ul><li>j) Rubber lining with Door stopper</li><li>k) S.S Screws 304 grade</li><li>Providig and fixing of CP coated shower hose of</li></ul>	each	4.00	47200.00	377600.00
41approved make as per instruction of engineer-in- charge.each4.008800.1535200.60AC&R WORKSupply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of sqmsqm10.00Image: Communication in the second s	40	<ul> <li>j) Rubber lining with Door stopper</li> <li>k) S.S Screws 304 grade</li> <li>Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in-</li> </ul>	each	4.00		
charge.8800.1535200.60AC&R WORKSupply, installation, balancing and commissioning of fabricated at site GSS sheet (sheet thickness of sqmsqm10.00	40	<ul> <li>j) Rubber lining with Door stopper</li> <li>k) S.S Screws 304 grade</li> <li>Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.</li> </ul>	each	4.00		
AC&R WORK     Image: Constant of the second se		<ul> <li>j) Rubber lining with Door stopper</li> <li>k) S.S Screws 304 grade</li> <li>Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in-charge.</li> <li>Providig and fixing of CP coated wall mixture of</li> </ul>				
Supply, installation, balancing and commissioning42of fabricated at site GSS sheet (sheet thickness of sqmsqm10.00		<ul> <li>j) Rubber lining with Door stopper</li> <li>k) S.S Screws 304 grade</li> <li>Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in-charge.</li> <li>Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in-</li> </ul>			1473.567	5894.27
42 of fabricated at site GSS sheet (sheet thickness of sqm 10.00		<ul> <li>j) Rubber lining with Door stopper</li> <li>k) S.S Screws 304 grade</li> <li>Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in-charge.</li> <li>Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in-charge.</li> </ul>			1473.567	5894.27
		<ul> <li>j) Rubber lining with Door stopper</li> <li>k) S.S Screws 304 grade</li> <li>Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in- charge.</li> <li>Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in- charge.</li> <li>AC&amp;R WORK</li> </ul>			1473.567	5894.27
0.63 mm) metal rectangular/round ducting 1124.97 11249.70	41	<ul> <li>j) Rubber lining with Door stopper</li> <li>k) S.S Screws 304 grade</li> <li>Providig and fixing of CP coated shower hose of approved make as per instruction of engineer-in-charge.</li> <li>Providig and fixing of CP coated wall mixture of approved make as per instruction of engineer-in-charge.</li> <li>AC&amp;R WORK</li> <li>Supply, installation, balancing and commissioning</li> </ul>	each	4.00	1473.567	5894.27

	complete with neoprene rubber gaskets, elbows, splitter dampers, vanes, hangers, supports etc., as per specifications				
43	Supply, installation, testing and commissioning of GI volume control duct damper complete with neoprene rubber gaskets, nuts, bolts, screws linkages, flanges etc., as per specifications.	sqm	1.00	7492.01	7492.01
44	Supplying & fixing of powder coated extruded aluminium supply air grills with aluminium volume control dampers as per specifications.	sqm	1.00	9681.35	9681.35
45	Supplying, fixing testing commissioning of supply air diffusers of powder coated aluminium with aluminium volume control dampers with anti smudge ring & removable core.	sqm	1.00	12955.25	12955.25
46	Supplying and fixing of 19mm thickness duly laminated aluminium foil of mat finish closed cell Nitrile rubber (Class "O") insulation on existing duct after applying suitable adhesive for Nitrile rubber. The joints shall be sealed with 50 mm wide and 3 mm thick self adhesive nitrile rubber tape insulation complete as per specifications and as required.	sqm	12.00	801.73	9620.76
	TOTAL AMOUNT				12,70,667.98